



**DTS GmbH**  
Diamond Tooling Systems


02

## CBN Indexable Inserts

CBN H25   CBN H35   CBN H45   CBN H65   CBN H85   CBN P25   CBN P45   CBN K65   CBN K85   CBN S85   CBN X90   CBN X95



Die and Mold



Industry



Automotive  
Mechanical Engineering



Medical Technology  
Micro Technology



Aerospace  
Engineering



## About us

DTS GmbH - Diamond Tooling Systems



## Welcome to DTS - Diamond Tooling Systems GmbH!

Based in Kaiserslautern - Germany - we have specialized in the development, production and distribution of precision tools equipped with ultrahard cutting materials, such as PCD (polycrystalline diamond), CVD-D (CVD thickfilm diamond), UltraDiamond (monocrystalline binderless diamond) and CBN (cubic boron nitride). As a leading manufacturer for tools with laser cutting edges, we offer machining solutions in the areas of turning, milling, grooving, drilling, reaming, threading, and tool holding.

To be able to economically process ultra-hard cutting materials such as PCD, CVD-D and CBN on precision tools we realized early on that we would have to move away from the traditional production technology of „grinding“ to new technologies such as the „laser removal process“. This decision has contributed to the fact that our customers regard us, DTS GmbH, as the pioneer and leading manufacturer of laser tools for machining.

Ultra-hard high-performance cutting materials have a key function in metal-cutting manufacturing. Precision tools equipped with ultra-hard cutting materials are products that require a great deal of explanation. The economical use of the cutting materials is only ensured if the machining process and the cutting material are coordinated with each other.

This is exactly where we at DTS - Diamond Tooling Systems GmbH - step in: Tools and processes are subjected to a comprehensive analysis by our experienced application engineers. Subsequently, the new process optimization is presented to the customer and in the next step, it is implemented in their production. Only in that way is it possible to exploit the optimum potential of our high-tech cutting materials.

Our experienced application engineers are also available to advise you during ongoing production. This close cooperation and mutual trust is the basis of our success.

With more than 25 years of optimization experience in the processing industry, this is where we see our strength!

## Contents

CBN Inserts

### Overview

Ultrahard Cutting Materials at a Glance .....	04
Our CBN cutting materials .....	06
Application examples our cutting edges in use .....	07
Our Cutting Material Assignment according to Material use .....	08
Wiper Inserts, Functionality .....	09
ISO Code .....	10

### Products

CCGW .....	12
CDGW .....	14
CNGA .....	16
DCGW .....	18
DNGA .....	20
EPGW .....	24
RBGN .....	26
RCGW .....	26
RNGN .....	28
SCGW .....	30
SNGA .....	32
SNGN .....	34
TCGW .....	36
TNGA .....	38
TPGW .....	40
VBGW .....	42
VCGW .....	44
VNGA .....	46
VXGW .....	48
WCGW .....	50
WNGA .....	52


### Technical Attachment

Cutting Parameters .....	56
Formulas .....	60

# PASSION FOR DIAMOND...

ultrahard cutting materials at a glance

... is not just a slogan for us - we live this passion in our daily dealings with our customers and we are your partner when it comes to diamond or CBN tools.

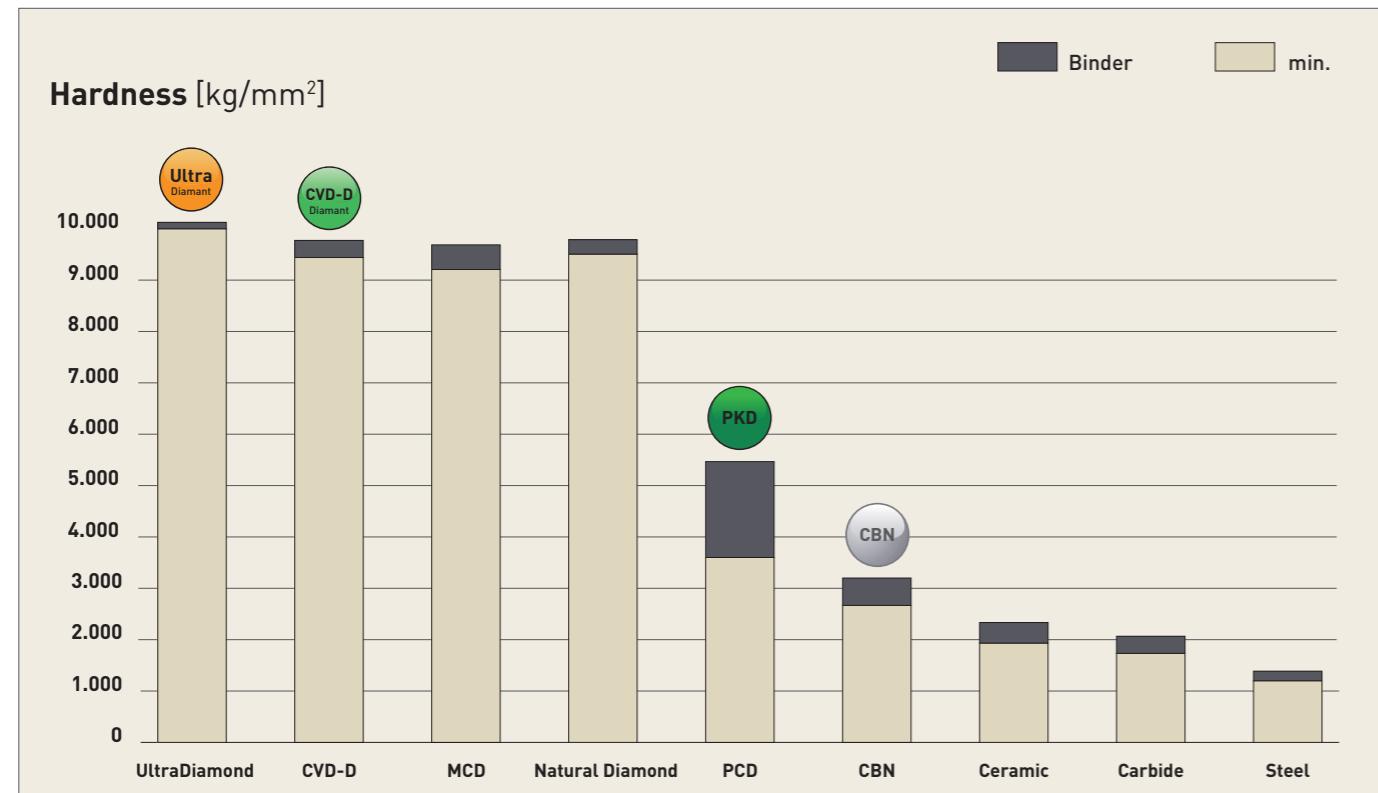

## Polycrystalline diamond (PCD)

The well-known Standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of diamond particles with a random orientation in a metal matrix. It is produced by sintering selected diamond particles under high pressure and high temperatures.

Graphite serves as a catalyst allowing the PDC crystals to intergrow. PCD has a high thermal conductivity and good heat dissipation away from the cutting edge. In addition, PCD has the highest bending fracture strength of all cutting materials.

PCD is very well suited for machining aluminum with a Si content of up to 10% and/or other abrasive fillers. The thermal hardness is about 750°C. The areas of application are like those of CVD thick-film diamond, but CVD thick film has a higher cost effectiveness with hard-brittle materials or aluminum from a Si content of 10%.

## CVD-Thickfilm Diamond (CVD-D)

The Star among Diamond Cutting Materials

For the machining of hard-brittle materials such as Ceramics, glass, glass-Ceramics, tungsten Carbide, MMC and fiber-reinforced composites such as CFRP and GFRP. Due to the lack of a bonding matrix, the diamond content is much higher than with PCD. In the group of ultra-hard cutting materials, binderless CVD-D is one of the hardest man-made diamond cutting materials.

CVD-D is characterized by high hardness as well as high wear resistance. These properties make CVD-D the perfect cutting material for machining abrasive materials. Compared to PCD, which is damaged by the abrasive particles due to its soft metallic binder phase, the CVD-D cutting edge remains stable due to its binderless anchoring in the diamond matrix.

With the correct use of CVD-D, the tool life can be increased by up to 10 times (and even more) compared to PCD!

## Binderless Diamond (UltraDiamond)

The hardest Mono Crystal

Single-crystal elements are laser-cut from diamond blanks in a defined orientation using laser segmentation technology. This new technology makes it possible, in addition to polycrystalline cutting materials such as PCD and CVD-D, to also braze a monocrystal (UltraDiamond) under high vacuum on any tool carrier. Compared to PCD, the tool life can be increased by approx. 15 to 25 times and compared to CVD-D by approx. 2 to 5 times.

The areas of application are similar to PCD and CVD-D, but this monocrystalline cutting material offers a further significant increase in tool life in all applications where PCD and CVD-D reach the limits of economic viability. The UltraDiamond cutting material makes economical machining of very hard, highly brittle materials such as Ceramics, glass, glass-Ceramics and hard metals with low cobalt binder and nickel binder (<10%) possible.

## Polycrystalline Cubic Boron Nitride (CBN)

Chemically resistant and stable at high temperatures

of up to 1,400°C. Boron nitride powder is the starting point for the production of CBN, which has been available since the end of the 1960s. It is produced under high pressure and at temperatures of over 1,500°C and the many different substrates are specifically adapted to the final application.

CBN is now considered the second hardest material after diamond cutting materials!

The applications of CBN take place in the automotive industry, aerospace, tool and die and mold making as well as in mechanical engineering. The wide range as cutting and abrasive material includes hardened steels, cast irons, chilled cast iron, sintered materials, stellites, nickel- and cobalt-based superalloys. In many applications, cubic boron nitride is preferred to diamond cutting materials because it is absolutely stable in air at temperatures up to 1,400°C. Diamond, on the other hand, begins to decompose at a temperature of approx. 750°C. Compared to PCD, CBN is also characterized by its chemical resistance to ferrous materials.

## Our cutting materials

and their main areas of application at a glance

Today, CBN is considered the second hardest material after diamond cutting materials!

Our wide range of cutting materials allows us to offer the ideal solution for your applications.

### CBN-H

Our CBN grades-H are specially for the machining of:

- hardened steels up to 72 HRC suitable

**H25**

**H35|45|65**

**H85**

- for continuous cut
- Allrounder-grade for continuous cut to heavily interrupted cut  
- 1st Choice is CBN H65
- specially designed for the highly interrupted cut

### CBN-P

The CBN grade-P has been specially developed for turning sintered materials.

- Sintered metal (\*hardened sintered metal can also be machined with our CBN-H grades)

**P25**

**P45**

- for continuous cut and light interrupted cut
- for continuous cut to heavily interrupted cut

### CBN-K

The CBN grade K has been specially developed for high-speed turning and milling of cast materials. Among others, you can machine these materials with this CBN grade:

- Grey cast iron
- Ductile iron
- Lamellar/ball cast alloys

**K65**

**K85**

- Allrounder for continuous cut to heavily interrupted cut
- for light interrupted cut to heavily interrupted cut

### CBN-S

The CBN grade S has been specially developed for turning and milling difficult-to-machine aerospace materials. Among others, you can machine these materials with this CBN grade:

- Ni-, Co-, Fe- & Cr- alloys
- Inconel 718

**S85**

- Allrounder for continuous cut to heavily interrupted cut

### CBN-X

The CBN grade-X has been specially developed for hard turning and milling of tool steels up to a hardness of 72HRC. You can also machine these materials with this CBN grade:

- HSS
- ASP, CPM and other PM- steels
- Cold work steels
- Hot work steels
- VHM >20%Co
- Solid carbide steel joints

**X90**

**X95**

- for continuous cut and light interrupted cut
- for light interrupted cut to heavily interrupted cut

## Our Cutting Material Assignment

about the materials

You cannot find your material in the table?

We are glad to help you by phone or by mail!

Phone: +49 (0) 6301 32011-0

Mail: info@Diamond-toolingsystems.com







ISO	Materials	1. Choice	Alternative	DTS CBN Grades				
		<input checked="" type="checkbox"/>	<input type="checkbox"/>	CBN-P	CBN-K	CBN-S	CBN-H	CBN-X
<b>H</b>	Cold Work Steel, hardened up to 72 HRC						<input type="checkbox"/>	<input checked="" type="checkbox"/>
	PM- Steels (ASP, CPM, Vanadis, Böhler)						<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Steel, hardened to 72 HRC						<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Hot Work Steel, hardened up to 72 HRC						<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Tool Steel, hardened up to 72 HRC						<input type="checkbox"/>	<input checked="" type="checkbox"/>
<b>P</b>	Sintered Steel	<input checked="" type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>
	Sintered Steel, hardened	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>
<b>K</b>	Grey Cast Iron (GG)		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	Ductile Cast Iron (GGG)		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	Shell Chilled Cast Iron	<input type="checkbox"/>					<input checked="" type="checkbox"/>	
<b>S</b>	Ni-, Co-, Fe- u. Cr-Alloys			<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>
	Titanium Alloys			<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
<b>M</b>	Stainless Steel, hardened					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Carbide, > 20% Co*	<input type="checkbox"/>						<input checked="" type="checkbox"/>
	* for the machining of Carbides							
<b>N</b>	we recommend the use of							
	CVD-D Cutting edges see Catalogue 01							

## Application examples

our cutting edges in use

Not only theory - we would like to show you our tools in action. Below you will find a selection of our CBN application videos. Click on the QR code for more information and the video.


Also visit our YouTube Channel at dts-gmbh!

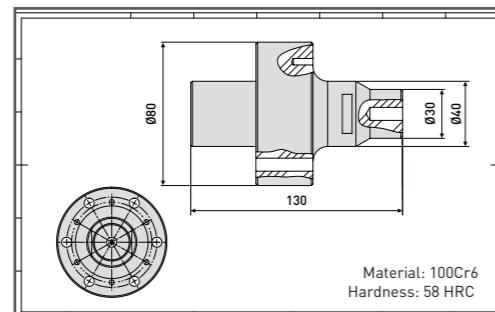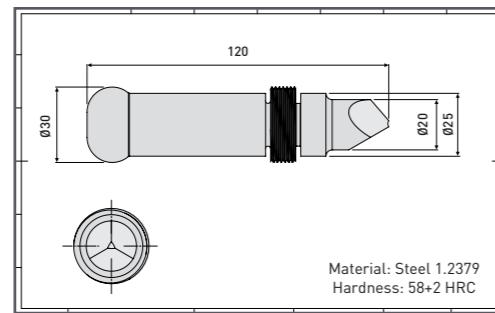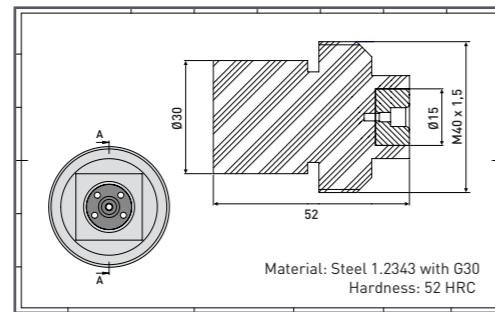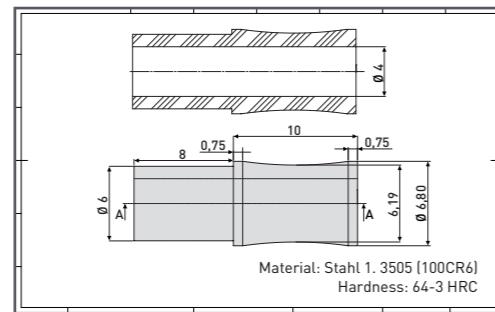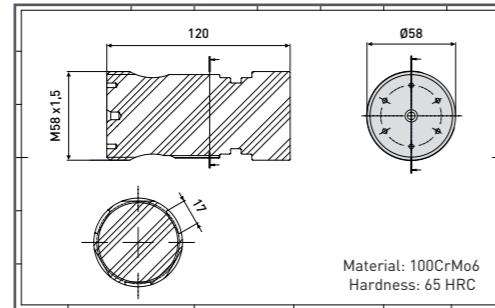

## Wiper Indexable Inserts

Functionality

### Wiper Indexable Inserts:

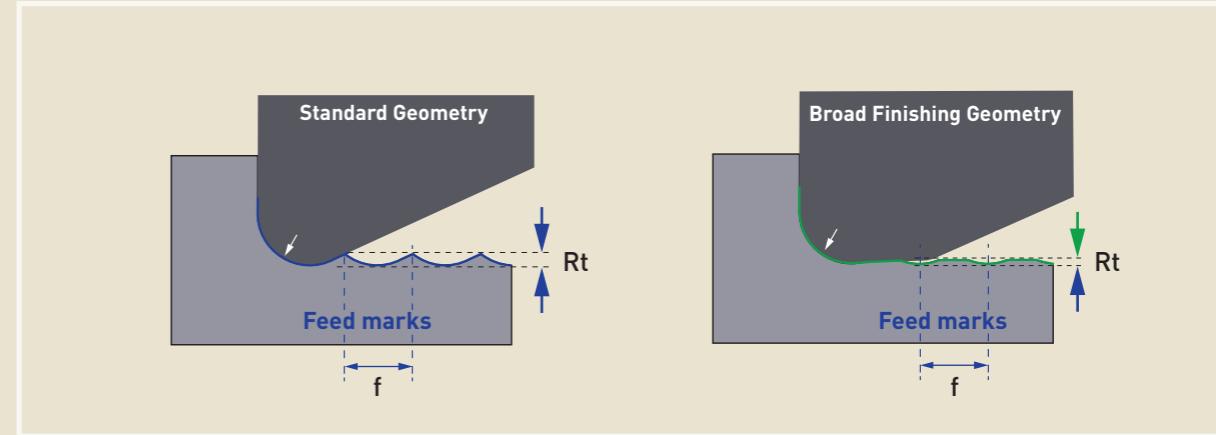

### Advantages when using Wiper Geometries

By using the same feed rate a 2-4 times better surface quality can be obtained or with a 2-4 times higher feed rate the same surface quality can be reached.

To get the wiper geometry into cutting condition please use the following lead angles at the machine:

**C and W Type:** 95°

**D Type:** 93°

Alternatively, you can use a sharp insert with F-geometries.

See pages 12, 18, 44

CCGW ...  
(Z2)



Page 12

CNGA ...  
(Z2)



Page 16

DCGW ...  
(Z2)



Page 18


WNGA ...  
(Z3)




Page 52

## Your notes


## Shape

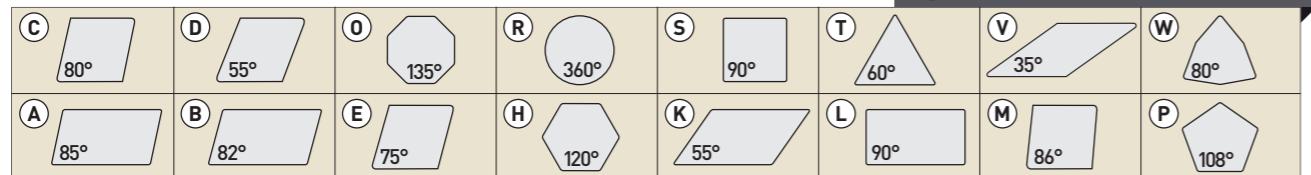

## Clearance




### Tolerance [mm]

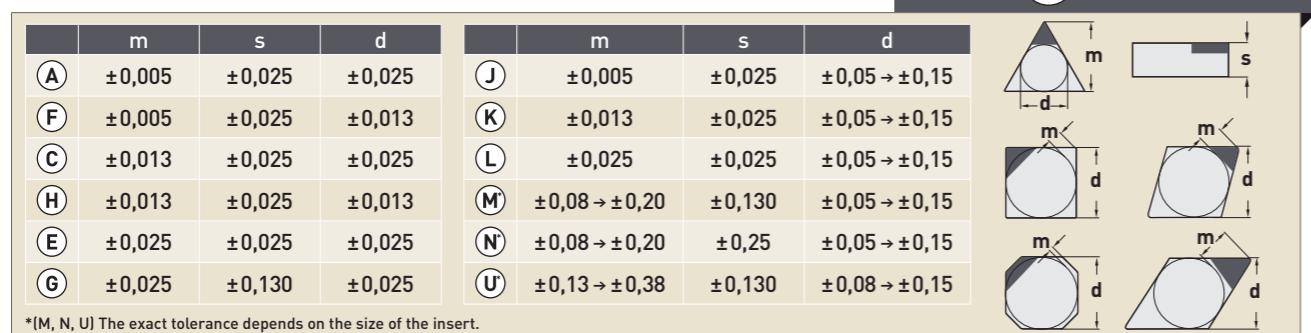


\***(M, N, U)** The exact tolerance depends on the size of the insert.


## Insert Type

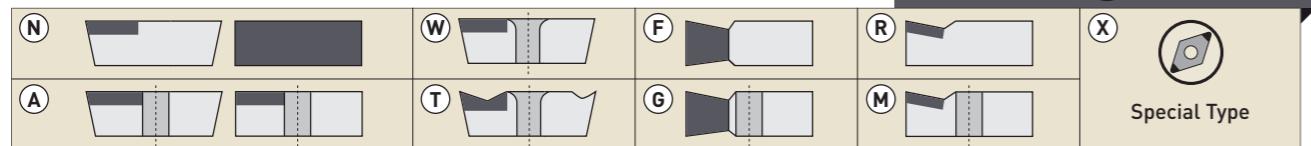

## Insert size [mm]

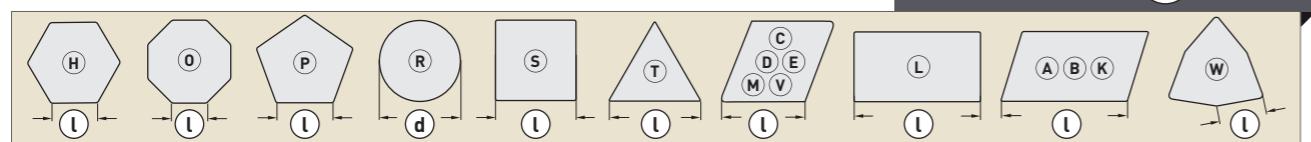



## Insert size [mm]



By numbers below 10 a 0 is added in at the front. Decimals remain unconsidered (for example: 4,76 = 04)

### Corner configuration [mm]

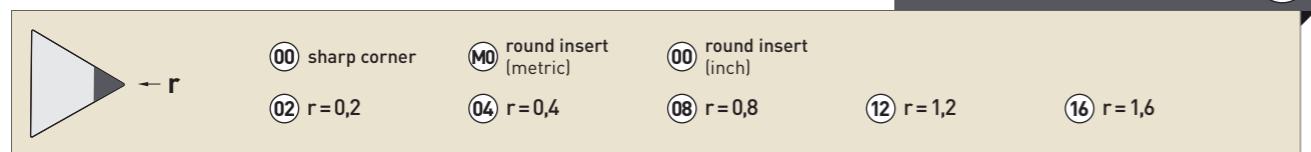

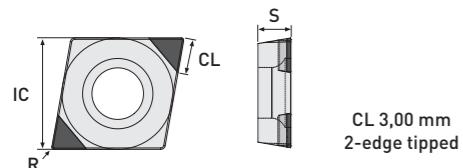

P25	P45	K65	K85	S85

ISO Code	IC	S	R	Item No.				
CCGW 060201	6,35	2,38	0,10			TI5510-0139		
CCGW 060202	6,35	2,38	0,20	TI5510-0140	TI5510-0141	TI5510-0142	TI5510-0143	TI5510-3102
CCGW 060204	6,35	2,38	0,40	TI5510-0145	TI5510-0146	TI5510-0147	TI5510-0148	TI5510-3104
CCGW 060208	6,35	2,38	0,80	TI5510-0150	TI5510-0151	TI5510-0152	TI5510-0153	TI5510-3106

CCGW 09T301	9,525	3,97	0,10			TI5510-1205		
CCGW 09T302	9,525	3,97	0,20	TI5510-0160	TI5510-0161	TI5510-0162	TI5510-0163	TI5510-3112
CCGW 09T304	9,525	3,97	0,40	TI5510-0165	TI5510-0166	TI5510-0167	TI5510-0168	TI5510-3114
CCGW 09T308	9,525	3,97	0,80	TI5510-0170	TI5510-0171	TI5510-0172	TI5510-0173	TI5510-3116
CCGW 120402	12,70	4,76	0,20	TI5510-0180	TI5510-0181	TI5510-0182	TI5510-0183	TI5510-3122
CCGW 120404	12,70	4,76	0,40	TI5510-0185	TI5510-0186	TI5510-0187	TI5510-0188	TI5510-3124
CCGW 120408	12,70	4,76	0,80	TI5510-0190	TI5510-0191	TI5510-0192	TI5510-0193	TI5510-3126
CCGW 120412	12,70	4,76	1,20	TI5510-0195	TI5510-0196	TI5510-0197	TI5510-0198	TI5510-3128

CCGW 060202-F	6,35	2,38	0,20			TI5510-2602		
CCGW 060204-F	6,35	2,38	0,40			TI5510-2604		
CCGW 09T302-F	9,525	3,97	0,20			TI5510-2612		
CCGW 09T304-F	9,525	3,97	0,40			TI5510-2614		

CCGW 09T302 R/L-W	9,525	3,97	0,20	TI5510-0205	TI5510-0206	TI5510-0207	TI5510-0208	
CCGW 09T304 R/L-W	9,525	3,97	0,40	TI5510-0210	TI5510-0211	TI5510-0212	TI5510-0213	TI5510-3144
CCGW 09T308 R/L-W	9,525	3,97	0,80	TI5510-0215	TI5510-0216	TI5510-0217	TI5510-0218	TI5510-3146
CCGW 120404 R/L-W	12,70	4,76	0,40	TI5510-0225	TI5510-0226	TI5510-0227	TI5510-0228	TI5510-3154
CCGW 120408 R/L-W	12,70	4,76	0,80	TI5510-0230	TI5510-0231	TI5510-0232	TI5510-0233	TI5510-3156
CCGW 120412 R/L-W	12,70	4,76	1,20	TI5510-0235	TI5510-0236	TI5510-0237	TI5510-0238	TI5510-3158

Detailed informations about cutting parameters and cooling can be found on page 56.

continuous cut

light interrupted cut

heavy interrupted cut

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-0139					TI5910-0139		2-edge tipped
TI5010-0140	TI5010-3102	TI5010-0141	TI5010-0142	TI5010-0143	TI5910-0142	TI5910-0143	2-edge tipped
TI5010-0145	TI5010-3104	TI5010-0146	TI5010-0147	TI5010-0148	TI5910-0147	TI5910-0148	2-edge tipped
TI5010-0150	TI5010-3106	TI5010-0151	TI5010-0152	TI5010-0153	TI5910-0152	TI5910-0153	2-edge tipped
TI5010-1205					TI5910-1205		2-edge tipped
TI5010-0160	TI5010-3112	TI5010-0161	TI5010-0162	TI5010-0163	TI5910-0162	TI5910-0163	2-edge tipped
TI5010-0165	TI5010-3114	TI5010-0166	TI5010-0167	TI5010-0168	TI5910-0167	TI5910-0168	2-edge tipped
TI5010-0170	TI5010-3116	TI5010-0171	TI5010-0172	TI5010-0173	TI5910-0172	TI5910-0173	2-edge tipped
TI5010-0180	TI5010-3122	TI5010-0181	TI5010-0182	TI5010-0183	TI5910-0182	TI5910-0183	2-edge tipped
TI5010-0185	TI5010-3124	TI5010-0186	TI5010-0187	TI5010-0188	TI5910-0187	TI5910-0188	2-edge tipped
TI5010-0190	TI5010-3126	TI5010-0191	TI5010-0192	TI5010-0193	TI5910-0192	TI5910-0193	2-edge tipped
TI5010-0195	TI5010-3128	TI5010-0196	TI5010-0197	TI5010-0198	TI5910-0197	TI5910-0198	2-edge tipped
TI5010-2402					TI5910-2602		2-edge tipped
TI5010-2404					TI5910-2604		2-edge tipped
TI5010-2412					TI5910-2612		2-edge tipped
TI5010-2414					TI5910-2614		2-edge tipped
					TI5910-0207	TI5910-0208	2-edge tipped
TI5010-0210	TI5010-3144	TI5010-0211	TI5010-0212	TI5010-0213	TI5910-0212	TI5910-0213	2-edge tipped
TI5010-0215	TI5010-3146	TI5010-0216	TI5010-0217	TI5010-0218	TI5910-0217	TI5910-0218	2-edge tipped
TI5010-0225	TI5010-3154	TI5010-0226	TI5010-0227	TI5010-0228	TI5910-0227	TI5910-0228	2-edge tipped
TI5010-0230	TI5010-3156	TI5010-0231	TI5010-0232	TI5010-0233	TI5910-0232	TI5910-0233	2-edge tipped
TI5010-0235	TI5010-3158	TI5010-0236	TI5010-0237	TI5010-0238	TI5910-0237	TI5910-0238	2-edge tipped

#### Application range:


- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our



Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

MiniTools	ISO Code	IC	S	R	P25	P45	K65	K85	S85
					Item No.	Item No.	Item No.	Item No.	Item No.
	CDGW 03X101-right	3,20	0,63	0,10			TI5530-0500		
	CDGW 03X102-right	3,20	0,63	0,20			TI5530-0502		
	CDGW 03X101-left	3,20	0,63	0,10			TI5530-0501		
	CDGW 03X102-left	3,20	0,63	0,20			TI5530-0503		

You can find the matching MiniTools in our precision boring tools catalog [03].

MiniTools	ISO Code	IC	S	R	P25	P45	K65	K85	S85
					Item No.	Item No.	Item No.	Item No.	Item No.
	CDGW 040101	3,97	1,00	0,10			TI5510-2510		
	CDGW 040102	3,97	1,00	0,20			TI5510-2512		
	CDGW 040104	3,97	1,00	0,40			TI5510-2514		

You can find the matching MiniTools in our precision boring tools catalog [03].

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
				TI5030-0500		TI5930-0500	FullFace (Z1)
				TI5030-0502		TI5930-0502	FullFace (Z1)
				TI5030-0501		TI5930-0501	FullFace (Z1)
				TI5030-0503		TI5930-0503	FullFace (Z1)

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
				TI5010-1511		TI5910-2510	2-edge tipped
				TI5010-1512		TI5910-2512	2-edge tipped
				TI5010-1513		TI5910-2514	2-edge tipped

#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)



All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

# CNGA

edge tipped

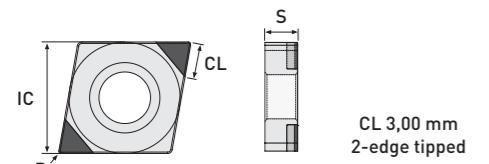

	P25	P45	K65	K85	S85
	Item No.				

	ISO Code	IC	S	R	Item No.				
	CNGA 120402	12,70	4,76	0,20	TI5510-0245	TI5510-0246	TI5510-0247	TI5510-0248	TI5510-3202
	CNGA 120404	12,70	4,76	0,40	TI5510-0250	TI5510-0251	TI5510-0252	TI5510-0253	TI5510-3204
	CNGA 120408	12,70	4,76	0,80	TI5510-0255	TI5510-0256	TI5510-0257	TI5510-0258	TI5510-3206
	CNGA 120412	12,70	4,76	1,20	TI5510-0260	TI5510-0261	TI5510-0262	TI5510-0263	TI5510-3208
	CNGA 120402 R/L-W	12,70	4,76	0,20	TI5510-0270	TI5510-0271	TI5510-0272	TI5510-0273	TI5510-3222
	CNGA 120404 R/L-W	12,70	4,76	0,40	TI5510-0275	TI5510-0276	TI5510-0277	TI5510-0278	TI5510-3224
	CNGA 120408 R/L-W	12,70	4,76	0,80	TI5510-0280	TI5510-0281	TI5510-0282	TI5510-0283	TI5510-3226
	CNGA 120412 R/L-W	12,70	4,76	1,20	TI5510-0285	TI5510-0286	TI5510-0287	TI5510-0288	TI5510-3228

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
	2. Alternative	1. Alternative	1. Choice			
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0245	TI5010-3202	TI5010-0246	TI5010-0247	TI5010-0248	TI5910-0247	TI5910-0248
TI5010-0250	TI5010-3204	TI5010-0251	TI5010-0252	TI5010-0253	TI5910-0252	TI5910-0253
TI5010-0255	TI5010-3206	TI5010-0256	TI5010-0257	TI5010-0258	TI5910-0257	TI5910-0258
TI5010-0260	TI5010-3208	TI5010-0261	TI5010-0262	TI5010-0263	TI5910-0262	TI5910-0263
TI5010-0270	TI5010-3222	TI5010-0271	TI5010-0272	TI5010-0273	TI5910-0272	TI5910-0273
TI5010-0275	TI5010-3224	TI5010-0276	TI5010-0277	TI5010-0278	TI5910-0277	TI5910-0278
TI5010-0280	TI5010-3226	TI5010-0281	TI5010-0282	TI5010-0283	TI5910-0282	TI5910-0283
TI5010-0285	TI5010-3228	TI5010-0286	TI5010-0287	TI5010-0288	TI5910-0287	TI5910-0288

	P25	P45	K65	K85	S85				
	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
	CNGA 120402	12,70	4,76	0,20	TI5510-0295	TI5510-0296	TI5510-0297	TI5510-0298	
	CNGA 120404	12,70	4,76	0,40	TI5510-0300	TI5510-0301	TI5510-0302	TI5510-0303	
	CNGA 120408	12,70	4,76	0,80	TI5510-0305	TI5510-0306	TI5510-0307	TI5510-0308	
	CNGA 120412	12,70	4,76	1,20	TI5510-0310	TI5510-0311	TI5510-0312	TI5510-0313	
	CNGA 120402 R/L-W	12,70	4,76	0,20	TI5510-0320	TI5510-0321	TI5510-0322	TI5910-0323	
	CNGA 120404 R/L-W	12,70	4,76	0,40	TI5510-0325	TI5510-0326	TI5510-0327	TI5510-0328	
	CNGA 120408 R/L-W	12,70	4,76	0,80	TI5510-0330	TI5510-0331	TI5510-0332	TI5510-0333	
	CNGA 120412 R/L-W	12,70	4,76	1,20	TI5510-0335	TI5510-0336	TI5510-0337	TI5510-0338	

### Application range:



- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

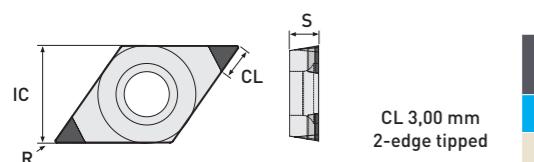

P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.
DCGW 04T001 (CL 2,00)	3,10	1,20	0,10	
DCGW 04T002 (CL 2,00)	3,10	1,20	0,20	TI5510-2524
DCGW 04T004 (CL 2,00)	3,10	1,20	0,40	TI5510-2526

## MiniTools

## Standard

## Sharp

## Wiper

! You will find the matching MiniTool holders for plate size 04 in our precision boring tools catalog [03].

## Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

! Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
DCGW 070201	6,35	2,38	0,10	TI5510-1224			2-edge tipped
DCGW 070202	6,35	2,38	0,20	TI5510-0385	TI5510-0386	TI5510-0387	TI5510-0388
DCGW 070204	6,35	2,38	0,40	TI5510-0390	TI5510-0391	TI5510-0392	TI5510-0393
DCGW 070208	6,35	2,38	0,80	TI5510-0395	TI5510-0396	TI5510-0397	TI5510-0398
DCGW 11T301	9,525	3,97	0,10	TI5510-1225			2-edge tipped
DCGW 11T302	9,525	3,97	0,20	TI5510-0405	TI5510-0406	TI5510-0407	TI5510-0408
DCGW 11T304	9,525	3,97	0,40	TI5510-0410	TI5510-0411	TI5510-0412	TI5510-0413
DCGW 11T308	9,525	3,97	0,80	TI5510-0415	TI5510-0416	TI5510-0417	TI5510-0418
DCGW 070202-F	6,35	2,38	0,20	TI5510-2632			2-edge tipped
DCGW 070204-F	6,35	2,38	0,40	TI5510-2634			2-edge tipped
DCGW 11T302-F	9,525	3,97	0,20	TI5510-2642			2-edge tipped
DCGW 11T304-F	9,525	3,97	0,40	TI5510-2644			2-edge tipped
DCGW 070204 R/L-W	6,35	2,38	0,40	TI5510-0425	TI5510-0426	TI5510-0427	TI5510-0428
DCGW 070208 R/L-W	6,35	2,38	0,80	TI5510-0430	TI5510-0431	TI5510-0432	TI5510-0433
DCGW 11T304 R/L-W	9,525	3,97	0,40	TI5510-0440	TI5510-0441	TI5510-0442	TI5510-0443
DCGW 11T308 R/L-W	9,525	3,97	0,80	TI5510-0445	TI5510-0446	TI5510-0447	TI5510-0448

! Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)


! All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

# DNGA

edge tipped

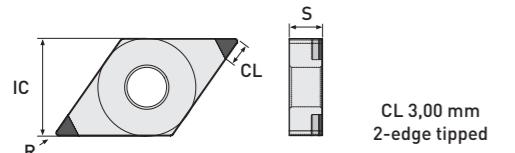

P25	P45	K65	K85	S85
ISO Code	IC	S	R	
DNGA 150401	12,70	4,76	0,10	
DNGA 150402	12,70	4,76	0,20	TI5510-0475
DNGA 150404	12,70	4,76	0,40	TI5510-0480
DNGA 150408	12,70	4,76	0,80	TI5510-0485
DNGA 150412	12,70	4,76	1,20	TI5510-0490

ISO Code	IC	S	R	Item No.				
DNGA 150401	12,70	4,76	0,10			TI5510-0472		
DNGA 150402	12,70	4,76	0,20	TI5510-0475	TI5510-0476	TI5510-0477	TI5510-0478	TI5510-3402
DNGA 150404	12,70	4,76	0,40	TI5510-0480	TI5510-0481	TI5510-0482	TI5510-0483	TI5510-3404
DNGA 150408	12,70	4,76	0,80	TI5510-0485	TI5510-0486	TI5510-0487	TI5510-0488	TI5510-3406
DNGA 150412	12,70	4,76	1,20	TI5510-0490	TI5510-0491	TI5510-0492	TI5510-0493	TI5510-3408

Standard

Wiper

P25	P45	K65	K85	S85				
ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
DNGA 150402	12,70	4,76	0,20	TI5510-0570	TI5510-0571	TI5510-0572	TI5510-0573	
DNGA 150404	12,70	4,76	0,40	TI5510-0575	TI5510-0576	TI5510-0577	TI5510-0578	
DNGA 150408	12,70	4,76	0,80	TI5510-0580	TI5510-0581	TI5510-0582	TI5510-0583	
DNGA 150412	12,70	4,76	1,20	TI5510-0585	TI5510-0586	TI5510-0587	TI5510-0588	

Standard

Wiper

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95	Version
2. Alternative	1. Alternative	1. Choice					
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-0470					TI5910-0472		2-edge tipped
TI5010-0475	TI5010-3402	TI5010-0476	TI5010-0477	TI5010-0478	TI5910-0477	TI5910-0478	2-edge tipped
TI5010-0480	TI5010-3404	TI5010-0481	TI5010-0482	TI5010-0483	TI5910-0482	TI5910-0483	2-edge tipped
TI5010-0485	TI5010-3406	TI5010-0486	TI5010-0487	TI5010-0488	TI5910-0487	TI5910-0488	2-edge tipped
TI5010-0490	TI5010-3408	TI5010-0491	TI5010-0492	TI5010-0493	TI5910-0492	TI5910-0493	2-edge tipped
TI5010-0525	TI5010-3444	TI5010-0526	TI5010-0527	TI5010-0528	TI5910-0527	TI5910-0528	2-edge tipped
TI5010-0530	TI5010-3446	TI5010-0531	TI5010-0532	TI5010-0533	TI5910-0532	TI5910-0533	2-edge tipped

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95	Version
2. Alternative	1. Alternative	1. Choice					
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-0570		TI5010-0571	TI5010-0572	TI5010-0573	TI5910-0572	TI5910-0573	4-edge tipped
TI5010-0575		TI5010-0576	TI5010-0577	TI5010-0578	TI5910-0577	TI5910-0578	4-edge tipped
TI5010-0580		TI5010-0581	TI5010-0582	TI5010-0583	TI5910-0582	TI5910-0583	4-edge tipped
TI5010-0585		TI5010-0586	TI5010-0587	TI5010-0588	TI5910-0587	TI5910-0588	4-edge tipped
TI5010-0620		TI5010-0621	TI5010-0622	TI5010-0623	TI5910-0622	TI5910-0623	4-edge tipped
TI5010-0625		TI5010-0626	TI5010-0627	TI5010-0628	TI5910-0627	TI5910-0628	4-edge tipped

### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.


Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

# DNGA

edge tipped

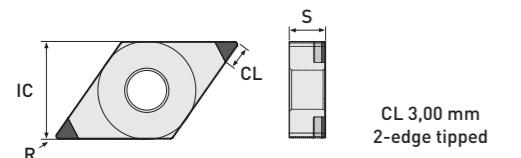

	P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.	Item No.

	ISO Code	IC	S	R	Item No.				
Standard	DNGA 150601	12,70	6,35	0,10			TI5510-0497		
	DNGA 150602	12,70	6,35	0,20	TI5510-0500	TI5510-0501	TI5510-0502	TI5510-0503	TI5510-3422
	DNGA 150604	12,70	6,35	0,40	TI5510-0505	TI5510-0506	TI5510-0507	TI5510-0508	TI5510-3424
	DNGA 150608	12,70	6,35	0,80	TI5510-0510	TI5510-0511	TI5510-0512	TI5510-0513	TI5510-3426
	DNGA 150612	12,70	6,35	1,20	TI5510-0515	TI5510-0516	TI5510-0517	TI5510-0518	TI5510-3428
Wiper	DNGA 150604 R/L-W	12,70	6,35	0,40	TI5510-0535	TI5510-0536	TI5510-0537	TI5510-0538	TI5510-3464
	DNGA 150608 R/L-W	12,70	6,35	0,80	TI5510-0540	TI5510-0541	TI5510-0542	TI5510-0543	TI5510-3466

	P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.	Item No.

	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
Standard	DNGA 150602	12,70	6,35	0,20	TI5510-0595	TI5510-0596	TI5510-0597	TI5510-0598	
	DNGA 150604	12,70	6,35	0,40	TI5510-0600	TI5510-0601	TI5510-0602	TI5510-0603	
	DNGA 150608	12,70	6,35	0,80	TI5510-0605	TI5510-0606	TI5510-0607	TI5510-0608	
	DNGA 150612	12,70	6,35	1,20	TI5510-0610	TI5510-0611	TI5510-0612	TI5510-0613	
	DNGA 150604 R/L-W	12,70	6,35	0,40	TI5510-0630	TI5510-0631	TI5510-0632	TI5510-0633	
Wiper	DNGA 150608 R/L-W	12,70	6,35	0,80	TI5510-0635	TI5510-0636	TI5510-0637	TI5510-0638	

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0495					TI5910-0497	
TI5010-0500	TI5010-3422	TI5010-0501	TI5010-0502	TI5010-0503	TI5910-0502	TI5910-0503
TI5010-0505	TI5010-3424	TI5010-0506	TI5010-0507	TI5010-0508	TI5910-0507	TI5910-0508
TI5010-0510	TI5010-3426	TI5010-0511	TI5010-0512	TI5010-0513	TI5910-0512	TI5910-0513
TI5010-0515	TI5010-3428	TI5010-0516	TI5010-0517	TI5010-0518	TI5910-0517	TI5910-0518
TI5010-0535	TI5010-3464	TI5010-0536	TI5010-0537	TI5010-0538	TI5910-0537	TI5910-0538
TI5010-0540	TI5010-3466	TI5010-0541	TI5010-0542	TI5010-0543	TI5910-0542	TI5910-0543

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0595		TI5010-0596	TI5010-0597	TI5010-0598	TI5910-0597	TI5910-0598
TI5010-0600		TI5010-0601	TI5010-0602	TI5010-0603	TI5910-0602	TI5910-0603
TI5010-0605		TI5010-0606	TI5010-0607	TI5010-0608	TI5910-0607	TI5910-0608
TI5010-0610		TI5010-0611	TI5010-0612	TI5010-0613	TI5910-0612	TI5910-0613
TI5010-0630		TI5010-0631	TI5010-0632	TI5010-0633	TI5910-0632	TI5910-0633
TI5010-0635		TI5010-0636	TI5010-0637	TI5010-0638	TI5910-0637	TI5910-0638

### Application range:


- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.



ISO Code	IC	S	R	P25	P45	K65	K85	S85
				Item No.	Item No.	Item No.	Item No.	Item No.
EPGW 050201	5,56	2,38	0,10			TI5510-2550		
EPGW 050202	5,56	2,38	0,20			TI5510-2552		
EPGW 050204	5,56	2,38	0,40			TI5510-2554		

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
				TI5010-1531		TI5910-2550	
				TI5010-1532		TI5910-2552	
				TI5010-1533		TI5910-2554	
							2-edge tipped

You can find the matching MiniTools in our precision boring tools catalog [03].

Want to see more of our cool videos?

Then check out our

YouTube channel @dts-gmbh!



You want to be always UpToDate and not miss any news?

Then take a look at our LinkedIn page

DTS GmbH - Diamond Tooling Systems!



#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...



You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

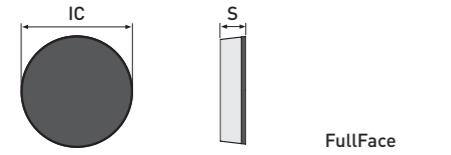

P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.
RBN 0602M0	6,00	2,38	-	TI5530-0090
RBN 0803M0	8,00	3,18	-	TI5530-0092
RBN 1003M0	10,00	3,18	-	TI5530-0094
RBN 1203M0	12,00	3,18	-	TI5530-0096

ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
RBN 0602M0	6,00	2,38	-		TI5530-0090			
RBN 0803M0	8,00	3,18	-		TI5530-0092			
RBN 1003M0	10,00	3,18	-		TI5530-0094			
RBN 1203M0	12,00	3,18	-		TI5530-0096			


Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

#### All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95	Version
2. Alternative	1. Alternative	1. Choice					
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
				TI5030-0090		TI5930-0090	
				TI5030-0092		TI5930-0092	
				TI5030-0094		TI5930-0094	
				TI5030-0096		TI5930-0096	

You can find the matching holders in our web store.



P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.
RGW 0602M0	6,00	2,38	-	TI5530-0102
RGW 0803M0	8,00	3,18	-	TI5530-0107
RGW 1003M0	10,00	3,18	-	TI5530-0117
RGW 10T3M0	10,00	3,97	-	TI5530-0122
RGW 1204M0	12,00	4,76	-	TI5530-0127

ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
RGW 0602M0	6,00	2,38	-		TI5530-0102			
RGW 0803M0	8,00	3,18	-		TI5530-0107			
RGW 1003M0	10,00	3,18	-		TI5530-0117			
RGW 10T3M0	10,00	3,97	-		TI5530-0122			
RGW 1204M0	12,00	4,76	-		TI5530-0127			

You will find the matching MiniTool holders for plate size 06 in our precision boring tools catalog [03].

**Application range:**

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...


You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.



Solid

	P25	P45	K65	K85	S85			
ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
RNGN 060300	6,35	3,18	-		TI5540-0090			
RNGN 060400	6,35	4,76	-		TI5540-0091			
RNGN 090300	9,52	3,18	-		TI5540-0100			
RNGN 090400	9,52	4,76	-		TI5540-0105			
RNGN 120300	12,70	3,18	-		TI5540-0115			
RNGN 120400	12,70	4,76	-		TI5540-0120			

Standard

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

#### All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
			TI5040-0090		TI5940-0090		Solid
			TI5040-0091		TI5940-0091		Solid
			TI5040-0100		TI5940-0100		Solid
			TI5040-0105		TI5940-0105		Solid
			TI5040-0115		TI5940-0115		Solid
			TI5040-0120		TI5940-0120		Solid

#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...


You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

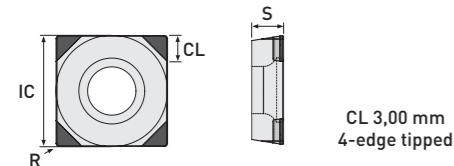

	P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.	Item No.

Standard	SCGW 09T302	9,525	3,97	0,20	TI5510-0645	TI5510-0646	TI5510-0647	TI5510-0648	
	SCGW 09T304	9,525	3,97	0,40	TI5510-0650	TI5510-0651	TI5510-0652	TI5510-0653	
	SCGW 09T308	9,525	3,97	0,80	TI5510-0655	TI5510-0656	TI5510-0657	TI5510-0658	
	SCGW 120402	12,70	4,76	0,20	TI5510-0665	TI5510-0666	TI5010-0667	TI5510-0668	
	SCGW 120404	12,70	4,76	0,40	TI5510-0670	TI5510-0671	TI5510-0672	TI5510-0673	
	SCGW 120408	12,70	4,76	0,80	TI5510-0675	TI5510-0676	TI5510-0677	TI5510-0678	
	SCGW 120412	12,70	4,76	1,20	TI5510-0680	TI5510-0681	TI5510-0682	TI5510-0683	

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

#### All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
	2. Alternative	1. Alternative	1. Choice			
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0645		TI5010-0646	TI5010-0647	TI5010-0648	TI5910-0647	TI5910-0648
TI5010-0650		TI5010-0651	TI5010-0652	TI5010-0653	TI5910-0652	TI5910-0653
TI5010-0655		TI5010-0656	TI5010-0657	TI5010-0658	TI5910-0657	TI5910-0658
TI5010-0665		TI5010-0666	TI5010-0667	TI5010-0668	TI5910-0667	TI5910-0668
TI5010-0670		TI5010-0671	TI5010-0672	TI5010-0673	TI5910-0672	TI5910-0673
TI5010-0675		TI5010-0676	TI5010-0677	TI5010-0678	TI5910-0677	TI5910-0678
TI5010-0680		TI5010-0681	TI5010-0682	TI5010-0683	TI5910-0682	TI5910-0683
Version						

#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)



All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

# SNGA

edge tipped

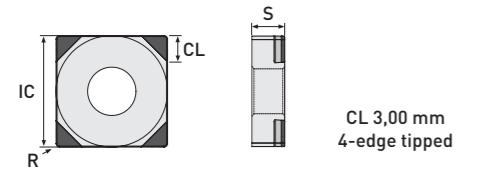


	P25	P45	K65	K85	S85
ISO Code	Item No.	Item No.	Item No.	Item No.	Item No.
SNGA 120404	12,70	4,76	0,40	TI5510-0690	TI5510-0691
SNGA 120408	12,70	4,76	0,80	TI5510-0695	TI5510-0696
SNGA 120412	12,70	4,76	1,20	TI5510-0700	TI5510-0701

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0690		TI5010-0691	TI5010-0692	TI5010-0693	TI5910-0692	TI5910-0693
TI5010-0695		TI5010-0696	TI5010-0697	TI5010-0698	TI5910-0697	TI5910-0698
TI5010-0700		TI5010-0701	TI5010-0702	TI5010-0703	TI5910-0702	TI5910-0703

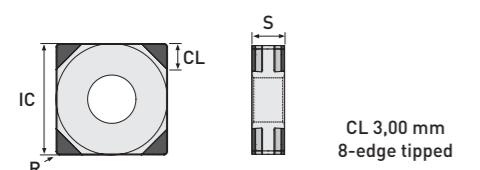

	P25	P45	K65	K85	S85
ISO Code	Item No.	Item No.	Item No.	Item No.	Item No.
SNGA 120404	12,70	4,76	0,40	TI5510-0710	TI5510-0711
SNGA 120408	12,70	4,76	0,80	TI5510-0715	TI5510-0716
SNGA 120412	12,70	4,76	1,20	TI5510-0720	TI5510-0721

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0710		TI5010-0711	TI5010-0712	TI5010-0713	TI5910-0712	TI5910-0713
TI5010-0715		TI5010-0716	TI5010-0717	TI5010-0718	TI5910-0717	TI5910-0718
TI5010-0720		TI5010-0721	TI5010-0722	TI5010-0723	TI5910-0722	TI5910-0723

### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...


You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

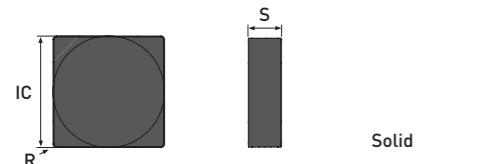

Solid

P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.
SNGN 090304	9,525	3,18	0,40	TI5540-0130
SNGN 090308	9,525	3,18	0,80	TI5540-0135
SNGN 090312	9,525	3,18	1,20	TI5540-0140
SNGN 120404	12,70	4,76	0,40	TI5540-0145
SNGN 120408	12,70	4,76	0,80	TI5540-0150
SNGN 120412	12,70	4,76	1,20	TI5540-0155
SNGN 120416	12,70	4,76	1,60	TI5540-0160

Standard

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

#### All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95	
2. Alternative	1. Alternative	1. Choice					Version
			TI5040-0130		TI5940-0130		Solid
			TI5040-0135		TI5940-0135		Solid
			TI5040-0140		TI5940-0140		Solid
			TI5040-0145		TI5940-0145		Solid
			TI5040-0150		TI5940-0150		Solid
			TI5040-0155		TI5940-0155		Solid
			TI5040-0160		TI5940-0160		Solid

#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...


You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.



Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

Standard	ISO Code	IC	S	R	CL 3,00 mm 3-edge tipped				
					P25	P45	K65	K85	S85
					Item No.	Item No.	Item No.	Item No.	Item No.
	TCGW 090201	5,56	2,38	0,10					
	TCGW 090202	5,56	2,38	0,20	TI5510-0730	TI5510-0731	TI5510-0732	TI5510-0733	TI5510-3502
	TCGW 090204	5,56	2,38	0,40	TI5510-0735	TI5510-0736	TI5510-0737	TI5510-0738	TI5510-3504
	TCGW 090208	5,56	2,38	0,80	TI5510-0740	TI5510-0741	TI5510-0742	TI5510-0743	TI5510-3506
	TCGW 110201	6,35	2,38	0,10					
	TCGW 110202	6,35	2,38	0,20	TI5510-0750	TI5510-0751	TI5510-0752	TI5510-0753	TI5510-3522
	TCGW 110204	6,35	2,38	0,40	TI5510-0755	TI5510-0756	TI5510-0757	TI5510-0758	TI5510-3524
	TCGW 110208	6,35	2,38	0,80	TI5510-0760	TI5510-0761	TI5510-0762	TI5510-0763	TI5510-3526
	TCGW 16T302	9,525	3,97	0,20	TI5510-0770	TI5510-0771	TI5510-0772	TI5510-0773	TI5510-3542
	TCGW 16T304	9,525	3,97	0,40	TI5510-0775	TI5510-0776	TI5510-0777	TI5510-0778	TI5510-3544
	TCGW 16T308	9,525	3,97	0,80	TI5510-0780	TI5510-0781	TI5510-0782	TI5510-0783	TI5510-3546

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-0725							3-edge tipped
TI5010-0730	TI5010-3502	TI5010-0731	TI5010-0732	TI5010-0733	TI5910-0732	TI5910-0733	3-edge tipped
TI5010-0735	TI5010-3504	TI5010-0736	TI5010-0737	TI5010-0738	TI5910-0737	TI5910-0738	3-edge tipped
TI5010-0740	TI5010-3506	TI5010-0741	TI5010-0742	TI5010-0743	TI5910-0742	TI5910-0743	3-edge tipped
TI5010-0745							3-edge tipped
TI5010-0750	TI5010-3522	TI5010-0751	TI5010-0752	TI5010-0753	TI5910-0752	TI5910-0753	3-edge tipped
TI5010-0755	TI5010-3524	TI5010-0756	TI5010-0757	TI5010-0758	TI5910-0757	TI5910-0758	3-edge tipped
TI5010-0760	TI5010-3526	TI5010-0761	TI5010-0762	TI5010-0763	TI5910-0762	TI5910-0763	3-edge tipped
TI5010-0770	TI5010-3542	TI5010-0771	TI5010-0772	TI5010-0773	TI5910-0772	TI5910-0773	3-edge tipped
TI5010-0775	TI5010-3544	TI5010-0776	TI5010-0777	TI5010-0778	TI5910-0777	TI5910-0778	3-edge tipped
TI5010-0780	TI5010-3546	TI5010-0781	TI5010-0782	TI5010-0783	TI5910-0782	TI5910-0783	3-edge tipped

#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)


All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

# TNGA

edge tipped

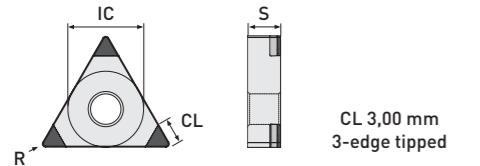

	P25	P45	K65	K85	S85

Standard	ISO Code	IC	S	R	Item No.				
	TNGA 160402	9,525	4,76	0,20	TI5510-0790	TI5510-0791	TI5510-0792	TI5510-0793	TI5510-3602
	TNGA 160404	9,525	4,76	0,40	TI5510-0795	TI5510-0796	TI5510-0797	TI5510-0798	TI5510-3604
	TNGA 160408	9,525	4,76	0,80	TI5510-0800	TI5510-0801	TI5510-0802	TI5510-0803	TI5510-3606
	TNGA 160412	9,525	4,76	1,20	TI5510-0805	TI5510-0806	TI5510-0807	TI5510-0808	TI5510-3608

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
	2. Alternative	1. Alternative	1. Choice			
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0790	TI5010-3602	TI5010-0791	TI5010-0792	TI5010-0793	TI5910-0792	TI5910-0793
TI5010-0795	TI5010-3604	TI5010-0796	TI5010-0797	TI5010-0798	TI5910-0797	TI5910-0798
TI5010-0800	TI5010-3606	TI5010-0801	TI5010-0802	TI5010-0803	TI5910-0802	TI5910-0803
TI5010-0805	TI5010-3608	TI5010-0806	TI5010-0807	TI5010-0808	TI5910-0807	TI5910-0808
Version						

Standard	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
	TNGA 160402	9,525	4,76	0,20	TI5510-0815	TI5510-0816	TI5510-0817	TI5510-0818	
	TNGA 160404	9,525	4,76	0,40	TI5510-0820	TI5510-0821	TI5510-0822	TI5510-0823	
	TNGA 160408	9,525	4,76	0,80	TI5510-0825	TI5510-0826	TI5510-0827	TI5510-0828	
	TNGA 160412	9,525	4,76	1,20	TI5510-0830	TI5510-0831	TI5510-0832	TI5510-0833	

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
	2. Alternative	1. Alternative	1. Choice			
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-0815		TI5010-0816	TI5010-0817	TI5010-0818	TI5910-0817	TI5910-0818
TI5010-0820		TI5010-0821	TI5010-0822	TI5010-0823	TI5910-0822	TI5910-0823
TI5010-0825		TI5010-0826	TI5010-0827	TI5010-0828	TI5910-0827	TI5910-0828
TI5010-0830		TI5010-0831	TI5010-0832	TI5010-0833	TI5910-0832	TI5910-0833
Version						

### Application range:



- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

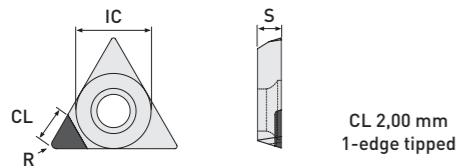

	P25	P45	K65	K85	S85			
ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
TPGW 06T101	3,97	1,98	0,10		TI5510-0786			
TPGW 06T102	3,97	1,98	0,20		TI5510-0787			
TPGW 06T104	3,97	1,98	0,40		TI5510-0788			

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
				TI5010-0786		TI5910-0786	
				TI5010-0787		TI5910-0787	
				TI5010-0788		TI5910-0788	
							Version

You can find the matching MiniTools in our precision boring tools catalog [03].

Want to see more of our cool videos?

Then check out our

YouTube channel @dts-gmbh!



You want to be always UpToDate and not miss any news?

Then take a look at our LinkedIn page

DTS GmbH - Diamond Tooling Systems!




#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.



P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.
VBGW 070201	3,97	2,38	0,10	
VBGW 070202	3,97	2,38	0,20	TI5510-0840
VBGW 070204	3,97	2,38	0,40	TI5510-0845
VBGW 110201	6,35	2,38	0,10	
VBGW 110202	6,35	2,38	0,20	TI5510-0855
VBGW 110204	6,35	2,38	0,40	TI5510-0860
VBGW 110208	6,35	2,38	0,80	TI5510-0865
VBGW 160401	9,525	4,76	0,10	
VBGW 160402	9,525	4,76	0,20	TI5510-0875
VBGW 160404	9,525	4,76	0,40	TI5510-0880
VBGW 160408	9,525	4,76	0,80	TI5510-0885

| Item No.    |
|-------------|-------------|-------------|-------------|-------------|
| TI5510-1264 |             |             |             |             |
| TI5510-0841 | TI5510-0842 | TI5510-0843 | TI5510-3652 |             |
| TI5510-0845 | TI5510-0846 | TI5510-0847 | TI5510-0848 | TI5510-3654 |
| TI5510-1265 |             |             |             |             |
| TI5510-0855 | TI5510-0856 | TI5510-0857 | TI5510-0858 | TI5510-3672 |
| TI5510-0860 | TI5510-0861 | TI5510-0862 | TI5510-0863 | TI5510-3674 |
| TI5510-0865 | TI5510-0866 | TI5510-0867 | TI5510-0868 | TI5510-3676 |
| TI5510-1267 |             |             |             |             |
| TI5510-0875 | TI5510-0876 | TI5510-0877 | TI5510-0878 | TI5510-3682 |
| TI5510-0880 | TI5510-0881 | TI5510-0882 | TI5510-0883 | TI5510-3684 |
| TI5510-0885 | TI5510-0886 | TI5510-0887 | TI5510-0888 | TI5510-3686 |

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

### All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-1264					TI5910-1264	
TI5010-0840	TI5010-3652	TI5010-0841	TI5010-0842	TI5010-0843	TI5910-0842	TI5910-0843
TI5010-0845	TI5010-3654	TI5010-0846	TI5010-0847	TI5010-0848	TI5910-0847	TI5910-0848
TI5010-1265					TI5910-1265	
TI5010-0855	TI5010-3672	TI5010-0856	TI5010-0857	TI5010-0858	TI5910-0857	TI5910-0858
TI5010-0860	TI5010-3674	TI5010-0861	TI5010-0862	TI5010-0863	TI5910-0862	TI5910-0863
TI5010-0865	TI5010-3676	TI5010-0866	TI5010-0867	TI5010-0868	TI5910-0867	TI5910-0868
TI5010-1267					TI5910-1267	
TI5010-0875	TI5010-3682	TI5010-0876	TI5010-0877	TI5010-0878	TI5910-0877	TI5910-0878
TI5010-0880	TI5010-3684	TI5010-0881	TI5010-0882	TI5010-0883	TI5910-0882	TI5910-0883
TI5010-0885	TI5010-3686	TI5010-0886	TI5010-0887	TI5010-0888	TI5910-0887	TI5910-0888

#### Application range:


- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.



Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

MiniTools	ISO Code	IC	S	R	P25 P45 K65 K85 S85				
					Item No.	Item No.	Item No.	Item No.	Item No.
	VCGW 050101 (CL 2,00)	3,10	1,59	0,10			TI5510-2528		
	VCGW 050102 (CL 2,00)	3,10	1,59	0,20			TI5510-2530		
	VCGW 050104 (CL 2,00)	3,10	1,59	0,40			TI5510-2532		
Standard	VCGW 070201	3,97	2,38	0,10			TI5510-1274		
	VCGW 070202	3,97	2,38	0,20	TI5510-0960	TI5510-0961	TI5510-0962	TI5510-0963	TI5510-3702
	VCGW 070204	3,97	2,38	0,40	TI5510-0965	TI5510-0966	TI5510-0967	TI5510-0968	TI5510-3704
	VCGW 110301	6,35	3,18	0,10			TI5510-1275		
	VCGW 110302	6,35	3,18	0,20	TI5510-0975	TI5510-0976	TI5510-0977	TI5510-0978	TI5510-3722
	VCGW 110304	6,35	3,18	0,40	TI5510-0980	TI5510-0981	TI5510-0982	TI5510-0983	TI5510-3724
	VCGW 110308	6,35	3,18	0,80	TI5510-0985	TI5510-0986	TI5510-0987	TI5510-0988	TI5510-3726
	VCGW 160401	9,525	4,76	0,10			TI5510-1277		
Sharp	VCGW 160402	9,525	4,76	0,20	TI5510-0995	TI5510-0996	TI5510-0997	TI5510-0998	TI5510-3742
	VCGW 160404	9,525	4,76	0,40	TI5510-1000	TI5510-1001	TI5510-1002	TI5510-1003	TI5510-3744
	VCGW 160408	9,525	4,76	0,80	TI5510-1005	TI5510-1006	TI5510-1007	TI5510-1008	TI5510-3746
	VCGW 160412	9,525	4,76	1,20	TI5510-1010	TI5510-1011	TI5510-1012	TI5510-1013	TI5510-3748
	VCGW 070202-F	3,97	2,38	0,20			TI5510-2672		
	VCGW 070204-F	3,97	2,38	0,40			TI5510-2674		
	VCGW 110302-F	6,35	3,18	0,20			TI5510-2682		
	VCGW 110304-F	6,35	3,18	0,40			TI5510-2684		
	VCGW 160402-F	9,525	4,76	0,20			TI5510-2692		
	VCGW 160404-F	9,525	4,76	0,40			TI5510-2694		

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
2. Alternative	1. Alternative	1. Choice					
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
			TI5010-1561		TI5910-2528		2-edge tipped
			TI5010-1562		TI5910-2530		2-edge tipped
			TI5010-1563		TI5910-2532		2-edge tipped
TI5010-1274					TI9510-1274		2-edge tipped
TI5010-0960	TI5010-3702	TI5010-0961	TI5010-0962	TI5010-0963	TI5910-0962	TI5910-0963	2-edge tipped
TI5010-0965	TI5010-3704	TI5010-0966	TI5010-0967	TI5010-0968	TI5910-0967	TI5910-0968	2-edge tipped
TI5010-1275					TI5910-1275		2-edge tipped
TI5010-0975	TI5010-3722	TI5010-0976	TI5010-0977	TI5010-0978	TI5910-0977	TI5910-0978	2-edge tipped
TI5010-0980	TI5010-3724	TI5010-0981	TI5010-0982	TI5010-0983	TI5910-0982	TI5910-0983	2-edge tipped
TI5010-0985	TI5010-3726	TI5010-0986	TI5010-0987	TI5010-0988	TI5910-0987	TI5910-0988	2-edge tipped
TI5010-1277					TI5910-1277		2-edge tipped
TI5010-0995	TI5010-3742	TI5010-0996	TI5010-0997	TI5010-0998	TI5910-0997	TI5910-0998	2-edge tipped
TI5010-1000	TI5010-3744	TI5010-1001	TI5010-1002	TI5010-1003	TI5910-1002	TI5910-1003	2-edge tipped
TI5010-1005	TI5010-3746	TI5010-1006	TI5010-1007	TI5010-1008	TI5910-1007	TI5910-1008	2-edge tipped
TI5010-1010	TI5010-3748	TI5010-1011	TI5010-1012	TI5010-1013	TI5910-1012	TI5910-1013	2-edge tipped
TI5010-2472					TI5910-2672		2-edge tipped
TI5010-2474					TI5910-2674		2-edge tipped
TI5010-2482					TI5910-2682		2-edge tipped
TI5010-2484					TI5910-2684		2-edge tipped
TI5010-2492					TI5910-2692		2-edge tipped
TI5010-2494					TI5910-2694		2-edge tipped

You can find the matching MiniTool holders for plate size 05 in our precision boring tools catalog (03).

Application range:	
	Sintered Steel ...
	Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
	Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
	Steel hardened up to 72 HRC, Cast Iron hardened ...
	Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...


You will find further application ranges in the detailed overview on page 8.

	Special tools on request for you! Please send inquiries to <a href="mailto:info@diamond-toolingsystems.com">info@diamond-toolingsystems.com</a>
	All our products are also available in the online shop. Visit us at <a href="http://diamond-tools24.com">diamond-tools24.com</a>
You can find our complete holder program in our tool holder catalog or in our online shop.	

Subject to technical changes.

# VNGA

edge tipped



P25	P45	K65	K85	S85
ISO Code	IC	S	R	Item No.
VNGA 160402	9,525	4,76	0,20	TI5510-1020
VNGA 160404	9,525	4,76	0,40	TI5510-1025
VNGA 160408	9,525	4,76	0,80	TI5510-1030
VNGA 160412	9,525	4,76	1,20	TI5510-1035

Item No.	Item No.	Item No.	Item No.	Item No.
TI5510-1021	TI5510-1022	TI5510-1023	TI5510-3782	
TI5510-1026	TI5510-1027	TI5510-1028	TI5510-3784	
TI5510-1031	TI5510-1032	TI5510-1033	TI5510-3786	
TI5510-1036	TI5510-1037	TI5510-1038	TI5510-3788	

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-1020	TI5010-3782	TI5010-1021	TI5010-1022	TI5010-1023	TI5910-1022	TI5910-1023
TI5010-1025	TI5010-3784	TI5010-1026	TI5010-1027	TI5010-1028	TI5910-1027	TI5910-1028
TI5010-1030	TI5010-3786	TI5010-1031	TI5010-1032	TI5010-1033	TI5910-1032	TI5910-1033
TI5010-1035	TI5010-3788	TI5010-1036	TI5010-1037	TI5010-1038	TI5910-1037	TI5910-1038

## All types of interrupted cut

H25	H35	H45	H65	H85	X90	X95
2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
TI5010-1045		TI5010-1046	TI5010-1047	TI5010-1048	TI5910-1047	TI5910-1048
TI5010-1050		TI5010-1051	TI5010-1052	TI5010-1053	TI5910-1052	TI5910-1053
TI5010-1055		TI5010-1056	TI5010-1057	TI5010-1058	TI5910-1057	TI5910-1058
TI5010-1060		TI5010-1061	TI5010-1062	TI5010-1063	TI5910-1062	TI5910-1063

### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.


Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

# VXGW

edge tipped

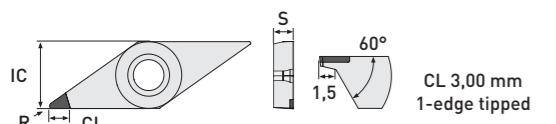

	P25	P45	K65	K85	S85			
ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
VXGW 160401	9,525	4,76	0,10		TI5510-1650			
VXGW 160402	9,525	4,76	0,20		TI5510-1655			
VXGW 160404	9,525	4,76	0,40		TI5510-1660			

DTS-Specials

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

## All types of interrupted cut


H25	H35	H45	H65	H85	X90	X95	
2. Alternative	1. Alternative	1. Choice					
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-1650					TI5910-1650		1-edge tipped
TI5010-1655					TI5910-1655		1-edge tipped
TI5010-1660					TI5910-1660		1-edge tipped

The matching holders on request, available from stock.

## DTS-Specials

### Face / Axial Machining:

Our DXGW cutting insert is designed for face and axial machining of contours from a minimum outside diameter of 10mm, using the maximum groove depth of 1.5mm.

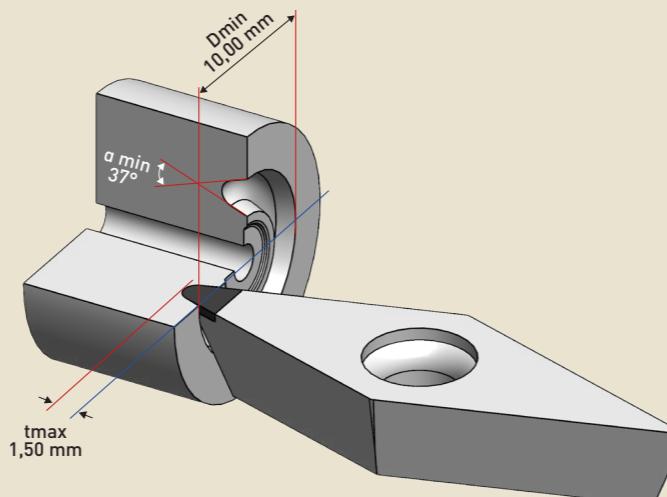

It is tipped with CVD-D as standard, but is of course also available with PCD or Ultra-Diamond on request.

#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...


You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.



Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

	ISO Code	IC	S	R	P25	P45	K65	K85	S85
					Item No.	Item No.	Item No.	Item No.	Item No.
	WCGW 020101	3,97	1,59	0,10			TI5510-2534		
	WCGW 020102	3,97	1,59	0,20			TI5510-2536		
	WCGW 020104	3,97	1,59	0,40			TI5510-2538		

MiniTools

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
				TI5010-1571		TI5910-2534	
				TI5010-1572		TI5910-2536	
				TI5010-1573		TI5910-2538	
							Version

You can find the matching MiniTools in our precision boring tools catalog [03].

Want to see more of our cool videos?  
Then check out our  
YouTube channel @dts-gmbh!



You want to be always UpToDate and not miss any news?  
Then take a look at our LinkedIn page  
DTS GmbH - Diamond Tooling Systems!



#### Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.



Subject to technical changes.

WNGA

edge tipped




- i Detailed informations about cutting parameters and cooling can be found on page 56.

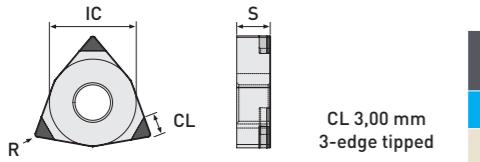

P25	P45	K65	K85	S85
				
				

	ISO Code	IC	S	R	Item No.				
Standard	WNGA 080402	12,70	4,76	0,20	TI5510-1070	TI5510-1071	TI5510-1072	TI5510-1073	TI5510-3902
	WNGA 080404	12,70	4,76	0,40	TI5510-1075	TI5510-1076	TI5510-1077	TI5510-1078	TI5510-3904
	WNGA 080408	12,70	4,76	0,80	TI5510-1080	TI5510-1081	TI5510-1082	TI5510-1083	TI5510-3906
	WNGA 080412	12,70	4,76	1,20	TI5510-1085	TI5510-1086	TI5510-1087	TI5510-1088	
Wiper	WNGA 080404 R/L-W	12,70	4,76	0,40	TI5510-1095	TI5510-1096	TI5510-1097	TI5510-1098	
	WNGA 080408 R/L-W	12,70	4,76	0,80	TI5510-1100	TI5510-1101	TI5510-1102	TI5510-1103	
	WNGA 080412 R/L-W	12,70	4,76	1,20	TI5510-1105	TI5510-1106	TI5510-1107	TI5510-1108	

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-1070		TI5010-1071	TI5010-1072	TI5010-1073	TI5910-1072	TI5910-1073	3-edge tipped
TI5010-1075		TI5010-1076	TI5010-1077	TI5010-1078	TI5910-1077	TI5910-1078	3-edge tipped
TI5010-1080		TI5010-1081	TI5010-1082	TI5010-1083	TI5910-1082	TI5910-1083	3-edge tipped
TI5010-1085		TI5010-1086	TI5010-1087	TI5010-1088	TI5910-1087	TI5910-1088	3-edge tipped
TI5010-1095		TI5010-1096	TI5010-1097	TI5010-1098	TI5910-1097	TI5910-1098	3-edge tipped
TI5010-1100		TI5010-1101	TI5010-1102	TI5010-1103	TI5910-1102	TI5910-1103	3-edge tipped
TI5010-1105		TI5010-1106	TI5010-1107	TI5010-1108	TI5910-1107	TI5910-1108	3-edge tipped

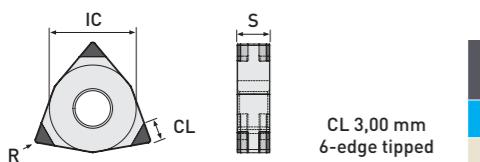

P25	P45	K65	K85	S85
 	 	 	 	  

	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
Standard	WNGA 080402	12,70	4,76	0,20	TI5510-1115	TI5510-1116	TI5510-1117	TI5510-1118	
	WNGA 080404	12,70	4,76	0,40	TI5510-1120	TI5510-1121	TI5510-1122	TI5510-1123	
	WNGA 080408	12,70	4,76	0,80	TI5510-1125	TI5510-1126	TI5510-1127	TI5510-1128	
	WNGA 080412	12,70	4,76	1,20	TI5510-1130	TI5510-1131	TI5510-1132	TI5510-1133	
Wiper	WNGA 080404 R/L-W	12,70	4,76	0,40	TI5510-1140	TI5510-1141	TI5510-1142	TI5510-1143	
	WNGA 080408 R/L-W	12,70	4,76	0,80	TI5510-1145	TI5510-1146	TI5510-1147	TI5510-1148	
	WNGA 080412 R/L-W	12,70	4,76	1,20	TI5510-1150	TI5510-1151	TI5510-1152	TI5510-1153	

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Version
TI5010-1115		TI5010-1116	TI5010-1117	TI5010-1118	TI5910-1117	TI5910-1118	6-edge tipped
TI5010-1120		TI5010-1121	TI5010-1122	TI5010-1123	TI5910-1122	TI5910-1123	6-edge tipped
TI5010-1125		TI5010-1126	TI5010-1127	TI5010-1128	TI5910-1127	TI5910-1128	6-edge tipped
TI5010-1130		TI5010-1131	TI5010-1132	TI5010-1133	TI5910-1132	TI5910-1133	6-edge tipped
TI5010-1140		TI5010-1141	TI5010-1142	TI5010-1143	TI5910-1142	TI5910-1143	6-edge tipped
TI5010-1145		TI5010-1146	TI5010-1147	TI5010-1148	TI5910-1147	TI5910-1148	6-edge tipped
TI5010-1150		TI5010-1151	TI5010-1152	TI5010-1153	TI5910-1152	TI5910-1153	6-edge tipped

#### **Application range:**

- CBN-P Sintered Steel ...
  - CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
  - CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
  - CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
  - CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel

You will find further application ranges in the detailed overview on page 8.



Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)





All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete **holder program** in our tool holder catalog or in our online shop.

# WNGA

edge tipped | with extended cutting edges for roughing and finishing

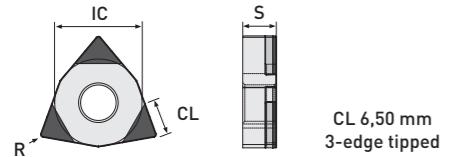

	P25	P45	K65	K85	S85			
ISO Code	IC	S	R	Item No.	Item No.	Item No.	Item No.	Item No.
WNGA 080404	12,70	4,76	0,40		TI5510-1291			
WNGA 080408	12,70	4,76	0,80		TI5510-1292			
WNGA 080412	12,70	4,76	1,20		TI5510-1293			

DTS-Specials

Detailed informations about cutting parameters and cooling can be found on page 56.

- continuous cut
- light interrupted cut
- heavy interrupted cut

All types of interrupted cut							
H25	H35	H45	H65	H85	X90	X95	
	2. Alternative	1. Alternative	1. Choice				
Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.
					TI5910-1291		3-edge tipped
					TI5910-1292		3-edge tipped
					TI5910-1293		3-edge tipped
							Version

Want to see more of our cool videos?

Then check out our

YouTube channel @dts-gmbh!



You want to be always UpToDate and not miss any news?

Then take a look at our LinkedIn page

DTS GmbH - Diamond Tooling Systems!



## Application range:

- CBN-P Sintered Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...
- CBN-S Ni-, Co-, Fe- and Cr-Alloys, Titanium, Titanium Alloys ...
- CBN-H Steel hardened up to 72 HRC, Cast Iron hardened ...
- CBN-X Tool Steel hardened, Stellite, Stainless Steel hardened, powder metallurgical Steel ...

You will find further application ranges in the detailed overview on page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or in our online shop.

Subject to technical changes.

# Cutting Parameters

for our CBN-Grades

- continuous cut
- light interrupted cut
- heavy interrupted cut

Material		P25			P45			K65			K85			S85		
		$V_c$ [m/min]	$a_p$ [mm]	F [mm/rev]												
Ductile Cast Iron (DCI)	min.							250	0,01	0,01	200	0,01	0,01			
	max.							1200	2,80	0,35	1000	2,80	0,30			
Grey Cast Iron (GCI)	min.							500	0,01	0,01	450	0,01	0,01			
	max.							2500	2,80	0,40	1400	2,80	0,35			
Ni-, Co-, Fe- and Cr-Alloys	min.										80	0,01	0,01			
	max.										350	0,50	0,30			
Sintered Steel	min.	200	0,01	0,01	180	0,01	0,01									
	max.	400	2,60	0,30	300	2,00	0,30									
Titanium	min.										80	0,01	0,01			
	max.										240	0,50	0,30			

Subject to technical changes.


## Cooling recommended

In machining with CBN inserts, proper cooling is a key to successful machining.

Here you will find our recommendation:

		Dry	Air	Emulsion	Oil
P	●	4. Choice	3. Choice	1. Choice	2. Choice
	●	2. Choice	1. Choice		
	●	2. Choice	1. Choice		
K	●	4. Choice	3. Choice	1. Choice	2. Choice
	●	2. Choice	1. Choice		
	●	2. Choice	1. Choice		
S	●		3. Choice	1. Choice	2. Choice
	●		2. Choice	1. Choice	
	●	2. Choice	1. Choice	3. Choice	

! Cutting parameters for hard turning can be found on page 58.

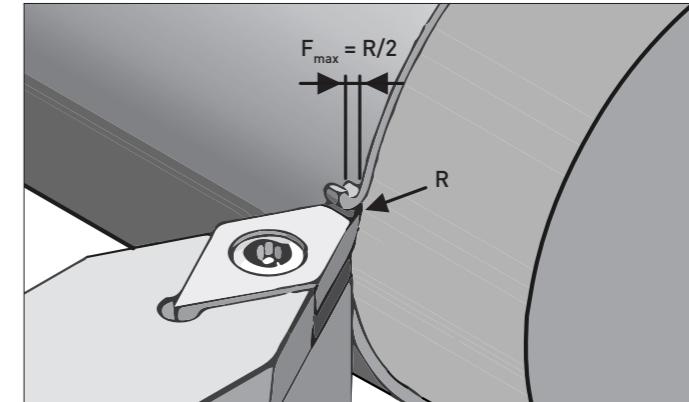

Never use max. ap with max. feed rate

Significantly higher cutting depths and feeds can be realized with RNGN and SNGN Solid inserts.

If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!

Phone: +49(0)6301 32011-0

Mail: info@diamond-toolingsystems.com

# Cutting parameters for hard machining

for our CBN-Grades

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

Material		H25			H35			H45			H65			H85			X90			X95			
		$V_c$ [m/min]	$a_p$ [mm]	F [mm/rev]																			
Ball Bearing and Spring Steel	min.	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	80	0,01	0,01							
	max.	400	1,00	0,30	360	1,00	0,50	360	0,50	0,50	360	0,50	0,50	200	0,40	0,30							
Case hardening steel	min.	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	80	0,01	0,01							
	max.	300	1,50	0,50	260	1,50	0,50	260	1,00	0,40	240	1,00	0,40	220	1,00	0,40							
Cast iron, hardened	min.	80	0,01	0,01	80	0,01	0,01	80	0,01	0,01	80	0,01	0,01	60	0,01	0,01							
	max.	220	1,50	0,50	200	1,00	0,50	200	1,00	0,50	200	1,00	0,50	180	0,50	0,30							
Cold and hot work tool steel, hardened up to 72 HRC	min.													60	0,01	0,01	60	0,01	0,01				
	max.													250	0,50	0,40	180	0,30	0,30				
Hard/soft machining	min.	80	0,01	0,01	80	0,01	0,01	80	0,01	0,01	80	0,01	0,01	80	0,01	0,01							
	max.	400	1,50	0,40	360	1,50	0,30	300	1,50	0,30	300	1,50	0,30	260	1,00	0,30							
Powder metallurgical steel, hardened up to 72 HRC	min.													60	0,01	0,01	60	0,01	0,01				
	max.													220	0,50	0,40	180	0,30	0,30				
Sintered steel, hardened	min.	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	80	0,01	0,01							
	max.	300	1,50	0,50	260	1,50	0,50	260	1,00	0,40	240	1,00	0,40	220	1,00	0,40							
Stainless steel, hardened	min.													80	0,01	0,01	60	0,01	0,01				
	max.													200	2,00	0,40	160	0,50	0,30				
Steel hardened up to 72 HRC	min.	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	100	0,01	0,01	80	0,01	0,01							
	max.	300	1,50	0,50	260	1,50	0,50	260	1,00	0,40	240	1,00	0,40	220	1,00	0,40							
Stellite	min.													60	0,01	0,01	40	0,01	0,01				
	max.													160	0,50	0,30	120	0,30	0,30				
Tool Steel, hardened up to 72 HRC	min.													100	0,01	0,01	60	0,01	0,01				
	max.													260	1,00	0,40	180	0,50	0,30				


Subject to technical changes.

## Cooling recommended

When cutting with CBN inserts, proper cooling is key to successful machining.

Here you will find our recommendation by cutting condition.

	Dry	Air	Emulsion	Oil
<b>H</b>		4. Choice	3. Choice	1. Choice
		2. Choice	1. Choice	3. Choice
		2. Choice	1. Choice	
<b>X</b>		4. Choice	3. Choice	1. Choice
		2. Choice	1. Choice	
		2. Choice	1. Choice	

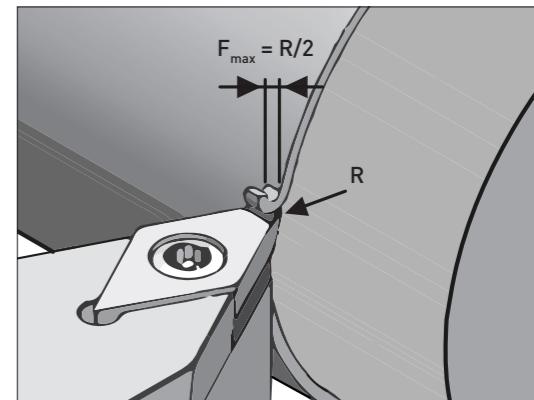

Never use max. ap with max. feed rate

Significantly higher cutting depths and feeds can be realized with RNGN and SNGN Solid inserts.


If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!

Phone: +49(0)6301 32011-0

Mail: info@diamond-toolingsystems.com

# Formulas

Turning

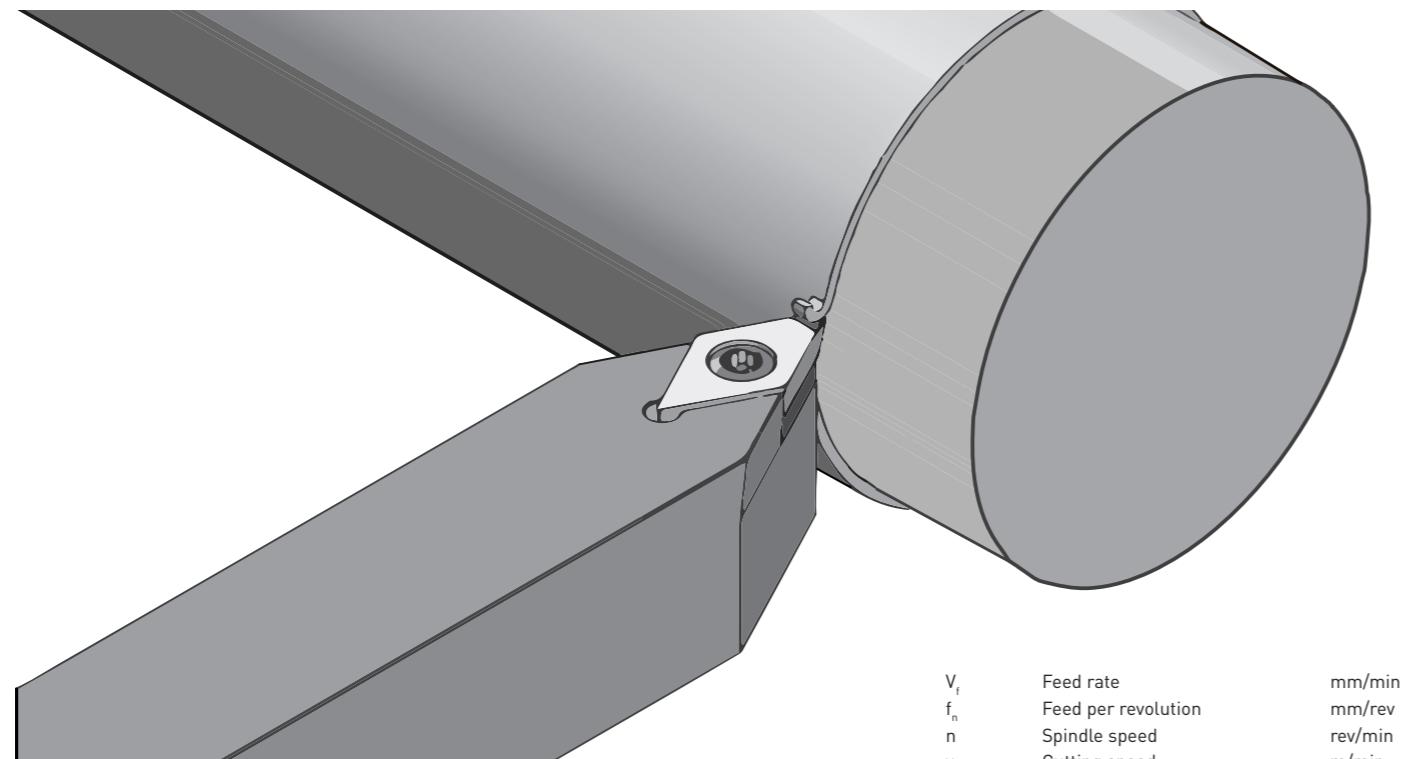

$V_f$	Feed rate	mm/min
$f_n$	Feed per revolution	mm/rev
$n$	Spindle speed	rev/min
$v_c$	Cutting speed	m/min
$D_c$	Cutter diameter	mm
$t_c$	Cutting Time	min
$l_m$	Cutting length	mm
$Q$	Stock removal rate	cm³/min
$a_p$	Cutting depth	mm

## ► Cutting speed

$$V_c = \frac{D_c \times \pi \times n}{1000} \quad [\text{m/min}]$$

## ► Spindle speed

$$n = \frac{v_c \times 1000}{\pi \times D_c} \quad [\text{rev/min}]$$

## ► Feed per revolution

$$f_n = \frac{V_f}{n} \quad [\text{mm/rev}]$$

## ► Cutting time


$$t_c = \frac{l_m}{f_n \times n} \quad [\text{min}]$$

## ► Stock removal rate

$$Q = v_c \times a_p \times f_n \quad [\text{cm}^3/\text{min}]$$

# Your notes

A large rectangular grid consisting of 20 columns and 20 rows of small squares, intended for users to write their own notes or calculations.

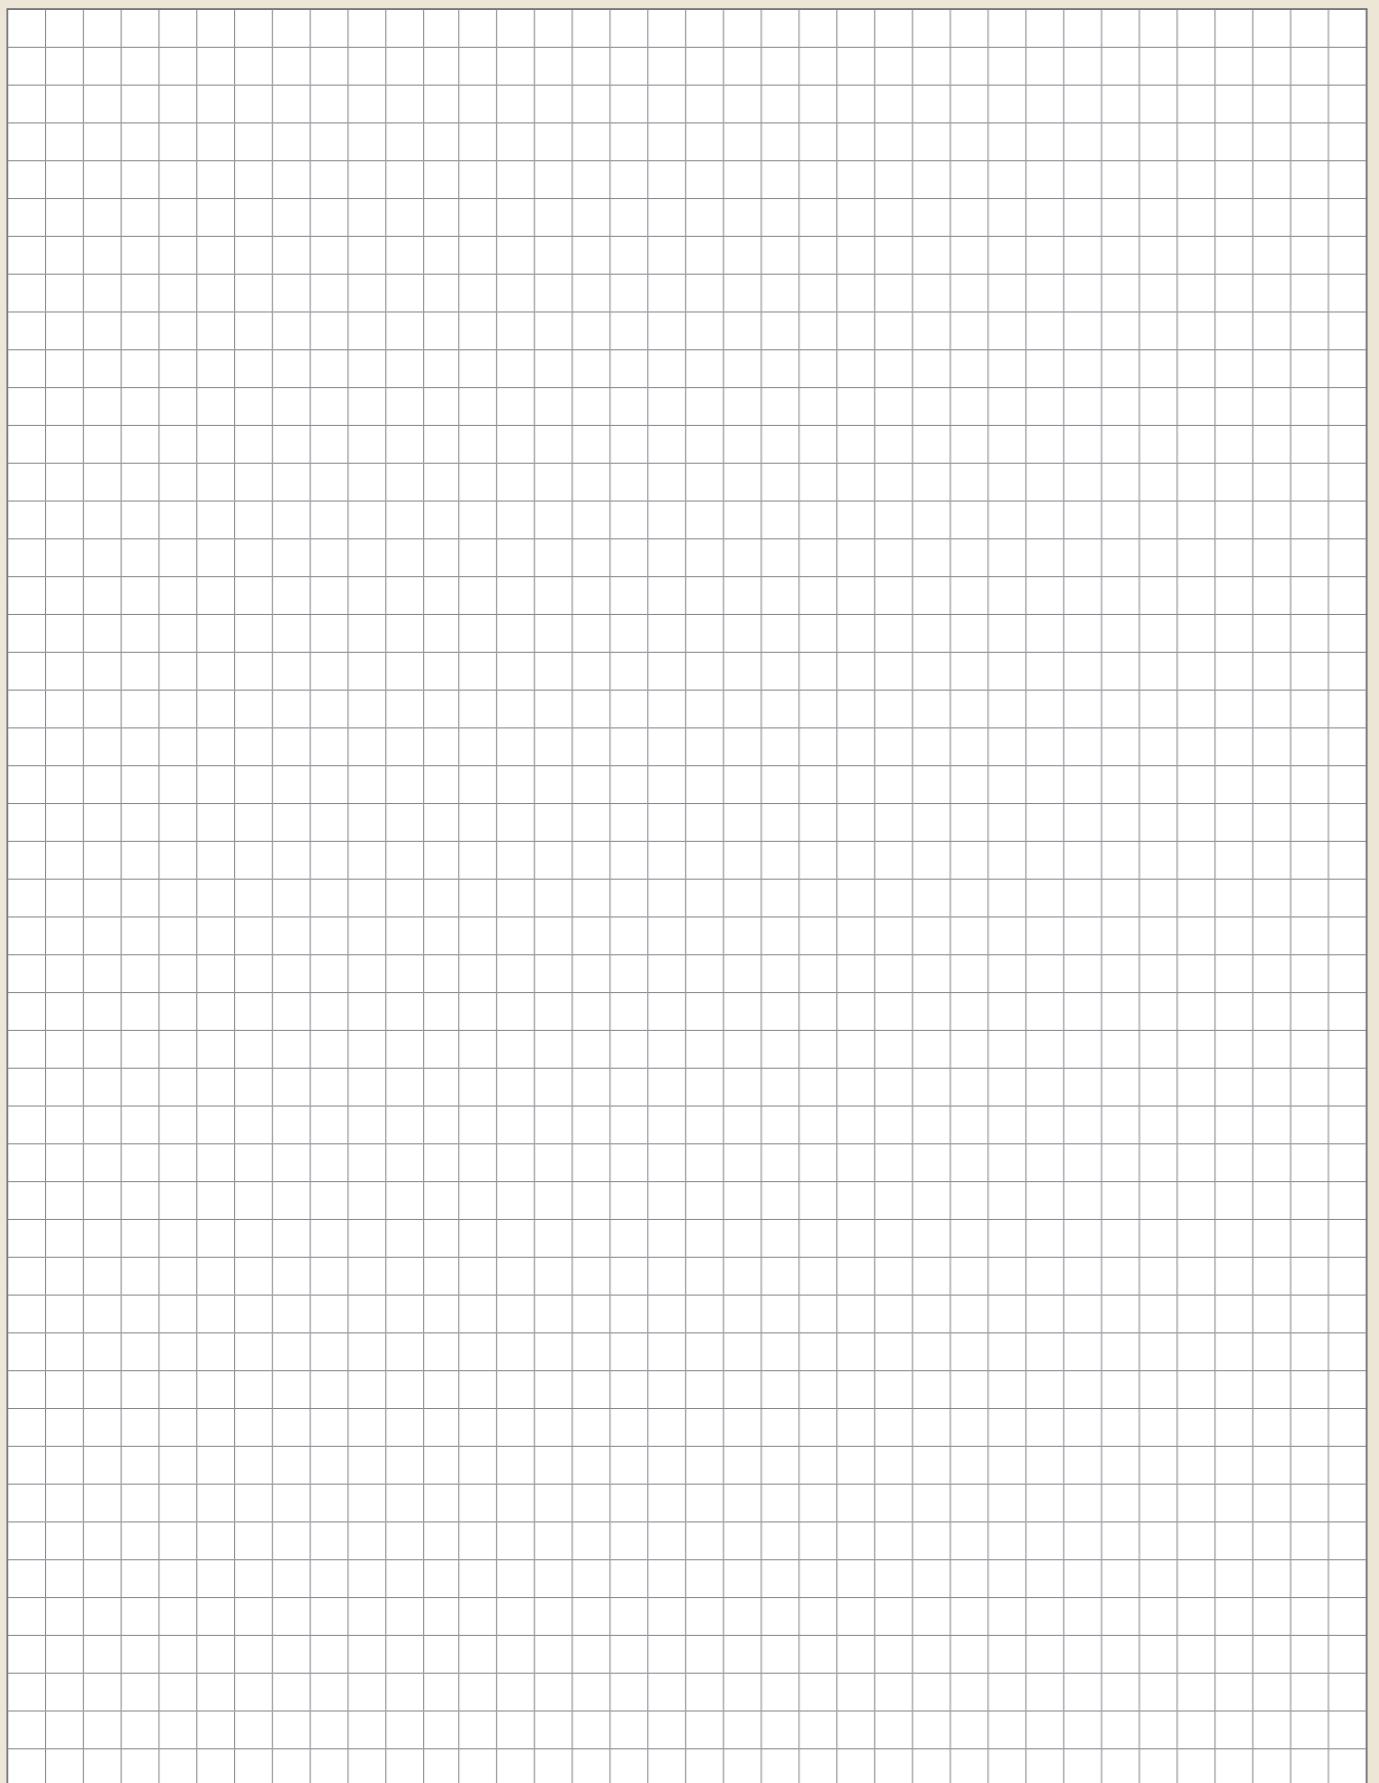

**Copyright:**

The reprint of our catalogs, copies of our flyers and newsletters or only excerpts such as illustrations, designs, technical information and design require the written permission of DTS GmbH. Copies or only excerpts such as illustrations, designs, technical information from our homepage and our online store are only permitted with the written consent of DTS GmbH.

All rights are reserved. Errors, misprints or printing errors do not entitle to claims. The pictorial and graphic representation of our tools do not necessarily have to correspond to the actual tool in all details.

We reserve the right to make production-related technical changes and changes to the delivery program. The cutting values given are guide values which must be adjusted according to the process environment.

**Safety Instructions:**

- ▶ DTS tools equipped with ultra-hard cutting edges are very sharp laser cut tools.
- ▶ Careful handling of the tools during unpacking and their use is recommended.
- ▶ Wearing protective gloves reduces the risk of injury.
- ▶ Material chipping and tool breakage may occur during machining, wearing safety glasses is recommended.
- ▶ Balanced holders are recommended for speeds above 10,000 rpm.
- ▶ We do not accept any responsibility for tools that have been modified, reground or used incorrectly and beyond their normal service life.
- ▶ Protective goggles are recommended when using DTS tools, sparks may also occur, make sure that no fire can occur.



YouTube



LinkedIn



DTS Shop



DTS Website



**PASSION FOR DIAMOND**

Hans-Geiger-Straße 11a · D-67661 Kaiserslautern

+49 (0) 6301 32011-0  
+49 (0) 6301 32011-90

[info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

Homepage: [www.diamond-toolingsystems.com](http://www.diamond-toolingsystems.com)

Shop: [www.diamond-tools24.com](http://www.diamond-tools24.com)