


SK	Norm	d_1	d_2	d_3	d_4	d_5	l_1	l_2	Bestell-Nr. Order no. / N° de Cda.
30	DIN 69872 A	M 12	13	13	9	4	44	14	60.300.112
40	DIN 69872 A	M 16	17	19	14	7	54	26	60.400.116
45	DIN 69872 A	M 20	21	23	17	9,5	65	30	60.450.120
50	DIN 69872 A	M 24	25	28	21	11,5	74	34	60.500.124
30	DIN 69872 B	M 12	13	13	9		44	14	66.300.112
40	DIN 69872 B	M 16	17	19	14		54	26	66.400.116
45	DIN 69872 B	M 20	21	23	17		65	30	66.450.120
50	DIN 69872 B	M 24	25	28	21		74	34	66.500.124
40	ISO 7388	M 16	17	19	14	5,5	54	26	66.400.P40T
40	ISO/DIS 7388 II B	M 16	17	18,95	12,95	7,35	44,5	16,4	67.400.116
40	ISO/DIS 7388 II A	M 16	17	19	13		44,5	16,4	67.4AA.116
50	ISO/DIS 7388 II B	M 24	25	29,1	19,6	11,55	65,5	25,55	67.500.124
50	ISO/DIS 7388 II A	M 24	25	29,1	19,6		65,5	25,6	67.5AA.124
40	DIN 2080	M 16	17	25	21	7	53	25	68.4IG.116*
40	DIN 2080	M 16	17	25	21,1	7	53	25	68.400.116
50	DIN 2080	M 24	25	39,3	32	7	65	25	68.5IG.124*




MAS BT 45°

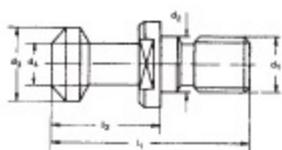

MAS BT 60°



MAS BT 90°

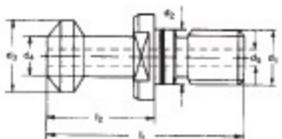

MAS BT 45°




MAS BT 60°






MAS BT 90°

SK	Norm	d ₁	d ₂	d ₃	d ₄	d ₅	l ₁	l ₂	Bestell-Nr. Order no. / N° de Cda.
30	MAS BT 45°	M 12	12,5	11	7		43	23	60.030.045
40	MAS BT 45°	M 16	17	15	10		60	35	60.040.045
40	MAS BT 45°	M 16	17	15	10		57	32	60.04X.045
40	MAS BT 45°	M 16	17	15	10	5	60	35	66.040.045
50	MAS BT 45°	M 24	25	23	17		85	45	60.050.045
50	MAS BT 45°	M 24	25	23	17	6	85	45	66.050.045
30	MAS BT 60°	M 12	12,5	11	7		43	23	60.030.060
40	MAS BT 60°	M 16	17	15	10		60	35	60.040.060
40	MAS BT 60°	M 16	17	15	10		57	32	60.04X.060
40	MAS BT 60°	M 16	17	15	10	5	60	35	66.040.060
50	MAS BT 60°	M 24	25	23	17		85	45	60.050.060
50	MAS BT 60°	M 24	25	23	17	6	85	45	66.050.060
30	MAS BT 90°	M 12	12,5	11	7		43	23	60.030.090
40	MAS BT 90°	M 16	17	15	10		60	35	60.040.090
40	MAS BT 90°	M 16	17	15	10		57	32	60.04X.A90
40	MAS BT 90°	M 16	17	15	10	5	60	35	66.040.090
50	MAS BT 90°	M 24	25	23	17		85	45	60.050.090
50	MAS BT 90°	M 24	25	23	17	6	85	45	66.050.090

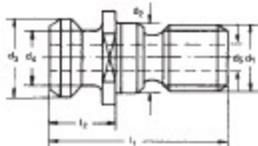

SK	Norm	d ₁	d ₂	d ₃	d ₄	d ₅	l ₁	l ₂	Bestell-Nr. Order no. / N° de Cds.
40	JIS B 6339	M 16	17	19	14	4	54	29	60.04R.P40T4,0
40	JIS B 6339	M 16	17	19	14	5,5	54	29	60.04R.P40T5,5
40	JIS B 6339	M 16	17	19	14	5,5/4,0	54	29	60.04R.P40T5,5/4,0
40	JIS B 6339	M 16	17	19	14	7	54	29	60.04X.P40T7,0
40	CAT metr.	M 16	17	18,8	12,45	7	41,26	16,26	60.400.CAT
40	CAT metr.	M 16	17	18,8	12,45	7	41,26	16,26	60.40R.CAT*
40	CAT / Fadal	M 16	17	18,9	12,5	7	44,1	19,1	60.40X.CAT
50	CAT metr.	M 24	25	28,95	20,9	10	65,4	25,4	60.500.CAT
40	Deckel S 20x2	M 16	17	23	S 20x2		54	26	60.S20.116
30	Chiron	M 12	13	10	6		36	20	60.300.CHI
30	Stama	M 12	13	10,4	8		36	20	60.336.STA
30	Stama	M 12	13	11	7		43,6	23,6	60.343.STA
30	Steinel	M 12	13	14	9,05		45,5	25	60.300.STE

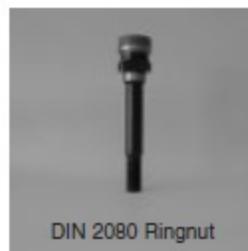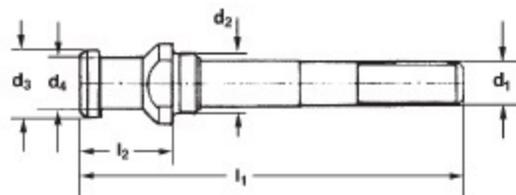

SK	Norm	d_1	MK	d_2	d_3	d_4	l_1	l_2	Bestell-Nr. Order no. / N° de Cdo.
40	DIN 69872 AD	M 6	1	17	19	14	107	26	60.400.107
40	DIN 69872 AD	M 10	2	17	19	14	105	26	60.400.105 MK 2
40	DIN 69872 AD	M 12	3	17	19	14	105	26	60.400.105 MK 3
40	DIN 69872 AD	M 16	4	17	19	14	115	26	60.400.115 MK 4
50	DIN 69872 AD	M 10	2	17	19	14	155	26	60.500.155
50	DIN 69872 AD	M 12	3	25	28	21	145	34	60.500.145
50	DIN 69872 AD	M 16	4	25	28	21	135	34	60.500.135
50	DIN 69872 AD	M 20	5	25	28	21	159	34	60.500.159
40	MAS BT 45°	M 6	1	17	15	10	110	35	60.041.045 MK 1
40	MAS BT 45°	M 10	2	17	15	10	105	35	60.041.045 MK 2
40	MAS BT 45°	M 12	3	17	15	10	115	35	60.041.045 MK 3
40	MAS BT 45°	M 16	4	17	15	10	120	35	60.041.045 MK 4
40	MAS BT 60°	M 6	1	17	15	10	110	35	60.041.060 MK 1
40	MAS BT 60°	M 10	2	17	15	10	105	35	60.041.060 MK 2
40	MAS BT 60°	M 12	3	17	15	10	115	35	60.041.060 MK 3
40	MAS BT 60°	M 16	4	17	15	10	120	35	60.041.060 MK 4
40	MAS BT 90°	M 6	1	17	15	10	110	35	60.041.090 MK 1
40	MAS BT 90°	M 10	2	17	15	10	105	35	60.041.090 MK 2
40	MAS BT 90°	M 12	3	17	15	10	115	35	60.041.090 MK 3
40	MAS BT 90°	M 16	4	17	15	10	120	35	60.041.090 MK 4
40	DIN 2080	M 6	1	17	25	21,1	105	25	68.400.105
40	DIN 2080	M 10	2	17	25	21,1	107	25	68.400.107
40	DIN 2080	M 12	3	17	25	21,1	112	25	68.400.112
40	DIN 2080	M 16	4	17	25	21,1	125	25	68.400.125