

SuperV-Bohrer

SuperV-M VHM-Universal-Kleinstbohrer




Katalog-Nr. 51720



P	M	K	N	S	H
•		•			

Arbeitsrichtwerte
Seite 34

- Ausspitzung $\geq \varnothing 0,800$
- Flächenanschliff
- Hauptschneidenform gerade

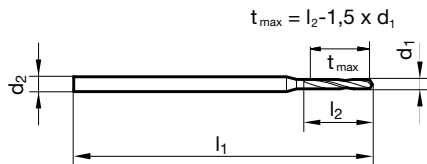

d1 mm	inch	d2 mm	l1 mm	l2 mm
0,100		3,000	38,000	1,200
0,150		3,000	38,000	2,000
0,200		3,000	38,000	2,500
0,250		3,000	38,000	3,000
0,300		3,000	38,000	5,000
0,310		3,000	38,000	5,000
0,350		3,000	38,000	6,000
0,370		3,000	38,000	6,000
0,400		3,000	38,000	7,000
0,450		3,000	38,000	7,000
0,500		3,000	38,000	7,000
0,550		3,000	38,000	7,000
0,600		3,000	38,000	7,000
0,640		3,000	38,000	7,000
0,650		3,000	38,000	7,000
0,700		3,000	38,000	8,000
0,710		3,000	38,000	8,000
0,720		3,000	38,000	8,000
0,740		3,000	38,000	8,000
0,750		3,000	38,000	8,000
0,790	1/32	3,000	38,000	8,000
0,800		3,000	38,000	10,000
0,810		3,000	38,000	10,000
0,820		3,000	38,000	10,000
0,840		3,000	38,000	10,000
0,900		3,000	38,000	10,000
0,910		3,000	38,000	10,000
0,920		3,000	38,000	10,000
0,930		3,000	38,000	10,000
0,940		3,000	38,000	10,000
0,950		3,000	38,000	10,000
0,990		3,000	38,000	10,000
1,000		3,000	38,000	10,000
1,100		3,000	38,000	10,000
1,150		3,000	38,000	10,000
1,200		3,000	38,000	10,000

d1 mm	inch	d2 mm	l1 mm	l2 mm
1,400		3,000	38,000	10,000
1,450		3,000	38,000	10,000
1,500		3,000	38,000	10,000
1,510		3,000	38,000	10,000
1,520		3,000	38,000	10,000
1,550		3,000	38,000	10,000
1,600		3,000	38,000	12,000
1,650		3,000	38,000	12,000
1,700		3,000	38,000	12,000
1,800		3,000	38,000	12,000
1,810		3,000	38,000	12,000
1,830		3,000	38,000	12,000
1,850		3,000	38,000	12,000
1,900		3,000	38,000	12,000
1,920		3,000	38,000	12,000
1,950	5/64	3,000	38,000	12,000
1,980		3,000	38,000	12,000
2,000		3,000	38,000	12,000
2,100		3,000	38,000	12,000
2,400		3,000	38,000	12,000
2,500		3,000	38,000	12,000
2,600		3,000	38,000	12,000
2,750		3,000	38,000	12,000
2,950		3,000	38,000	12,000
3,000		3,000	38,000	12,000