


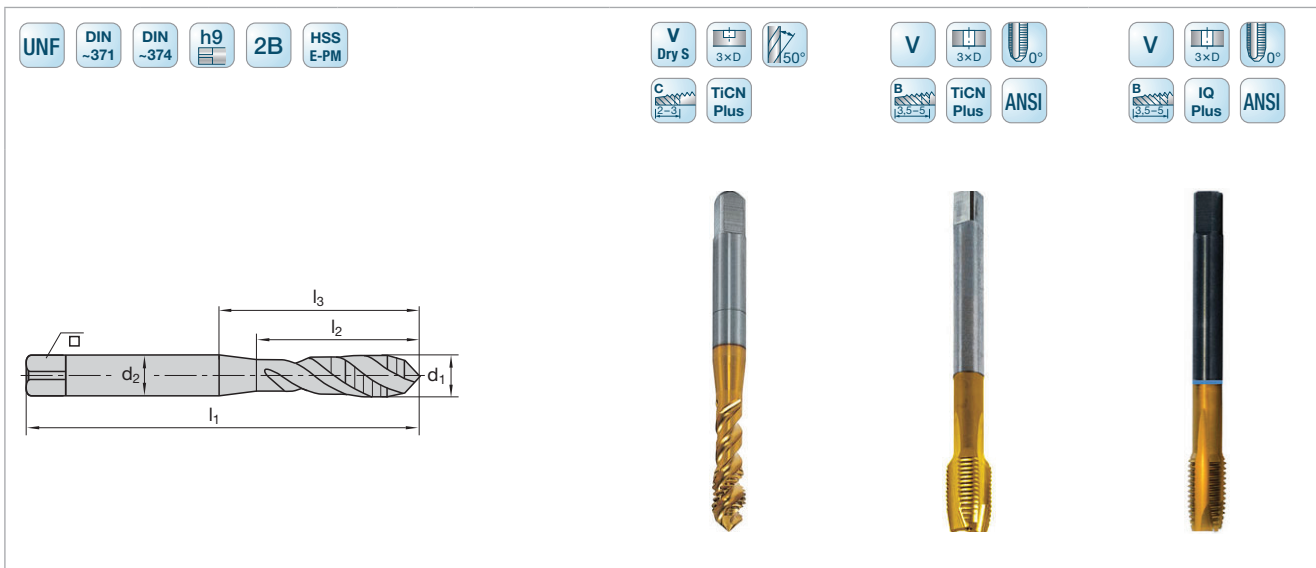

Katalog-Nr. Cat.-No.								6569C	6705C	6705C
d ₁	P	l ₁	l ₂	l ₃	d ₂	□ h12	z	Ident No.	Ident No.	Ident No.
mit verstärktem Zylinderschaft with reinforced straight shank										
UNF Nr. 2	64	45	4	11	2,8	2,1	3	1390046	–	–
UNF Nr. 3	56	50	5	15	2,8	2,1	3	1390047	–	–
UNF Nr. 4	48	56	5	17	3,5	2,7	3	1390048	–	–
UNF Nr. 5	44	56	6	18	3,5	2,7	3	1390049	–	–
UNF Nr. 6	40	56	6	20	4	3	3	1390050	–	–
UNF Nr. 6	40	56	8	20	3,58	2,79	3	–	1401067	9117770
UNF Nr. 8	36	63	7	21	4,5	3,4	3	1390051	–	–
UNF Nr. 8	36	63	8	21	4,27	3,33	3	–	1401069	9117775
UNF Nr. 10	32	70	8	25	6	4,9	3	1390052	–	–
UNF Nr. 10	32	70	10	25	4,93	3,86	3	–	1401071	9117781
UNF Nr. 12	28	80	9	27	6	4,9	3	1390053	–	–
UNF Nr. 12	28	80	11	27	5,59	4,19	3	–	1401073	9117795
UNF 1/4	28	80	9	30	7	5,5	3	1390054	–	–
UNF 1/4	28	80	13	30	6,48	4,85	3	–	1401075	9117797
UNF 5/16	24	90	11	–	6	4,9	3	1390055	–	–
UNF 5/16	24	90	14	35	8,08	6,05	3	–	1401077	9117799
UNF 3/8	24	100	11	–	7	5,5	3	1390056	–	–
UNF 3/8	24	100	16	35	9,68	7,26	3	–	1401079	9117801
mit Überlaufschaft with standard straight shank										
UNF 7/16	20	100	13	–	8	6,2	3	1390057	–	–
UNF 7/16	20	100	18	–	8,2	6,15	3	–	1401081	9117804
UNF 1/2	20	100	13	–	9	7	3	1390058	–	–
UNF 1/2	20	100	18	–	9,32	6,99	3	–	1401083	9117806
UNF 9/16	18	100	14	–	11	9	3	1390059	–	–
UNF 9/16	18	100	20	–	10,9	8,18	4	–	1401085	9117808
UNF 5/8	18	100	14	–	12	9	4	1390060	–	–
UNF 5/8	18	100	20	–	12,19	9,14	4	–	1401087	9117810
UNF 3/4	16	110	16	–	14	11	4	1390061	–	–
UNF 3/4	16	110	22	–	14,99	11,23	4	–	1401089	–
UNF 7/8	14	125	18	–	18	14,5	4	1390062	–	–
UNF 7/8	14	125	25	–	17,7	13,28	4	–	1401091	–
UNF 1	12	140	21	–	18	14,5	4	1390063	–	–
UNF 1	12	140	28	–	20,32	15,24	4	–	1401093	–
UNF 1 1/8	12	150	28	–	22,76	17,07	4	–	1401095	–
UNF 1 1/4	12	150	28	–	25,93	19,45	4	–	1401097	–
UNF 1 3/8	12	170	30	–	28,14	21,11	6	–	1401099	–
UNF 1 1/2	12	170	30	–	31,32	23,5	6	–	1401101	–

Anwendungsempfehlungen ab Seite D.2
Application recommendations starting page D.2