


BA05 4H

A-Line

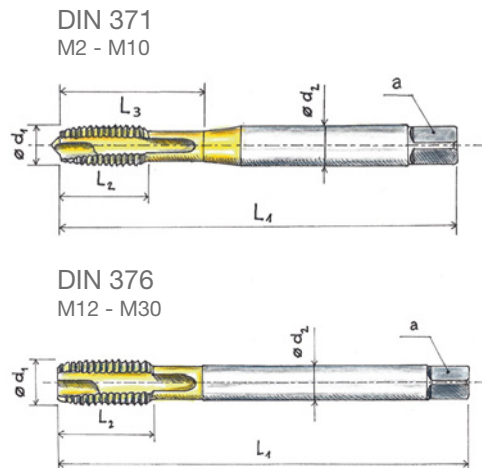

ISO		[m/min]
P	P.2	30-35
	P.3	25-30
	P.4	20-25
	P.5	10-15
	P.7	10-15
M	M.1	10-15
K	K.2	25-30
N	N.2	30-35
	N.3	30-35
	N.6	25-30

Artikelbezeichnung Item Code	Bestell-Nr. Ordering No.	Verfügbarkeit Availability	Typ Type	Abmessungen [mm] Dimensions [mm]							z	 [mm]
				d ₁	P	L ₁	L ₂	L ₃	d ₂	a		
BA05 4H 02 M2	5162586	●	M	2	0.4	45	7	11	2.8	2.1	2	1.6
BA05 4H 02 M2.5	5162589	●	M	2.5	0.45	50	9	15	2.8	2.1	3	2.05
BA05 4H 02 M3	5162590	●	M	3	0.5	56	10	18	3.5	2.7	3	2.5
BA05 4H 02 M4	5162592	●	M	4	0.7	63	12	21	4.5	3.4	3	3.3
BA05 4H 02 M5	5162602	●	M	5	0.8	70	14	24.5	6	4.9	3	4.2
BA05 4H 02 M6	5162603	●	M	6	1	80	16	29	6	4.9	3	5
BA05 4H 02 M8	5162604	●	M	8	1.25	90	18	33	8	6.2	3	6.8
BA05 4H 02 M10	5162605	●	M	10	1.5	100	20	36	10	8	3	8.5
Mit Überlaufschaft with standard straight shank												
BA05 4H 02 M12	5162606	●	M	12	1.75	110	24	-	9	7	4	10.2
BA05 4H 02 M14	5162607	●	M	14	2	110	25	-	11	9	4	12
BA05 4H 02 M16	5162608	●	M	16	2	110	28	-	12	9	4	14