

BA60 7G

A-Line

HSSE

TiN
B+

7G

M



RH


2.5xD

C


40°
RSP



DIN 371
M2 - M10

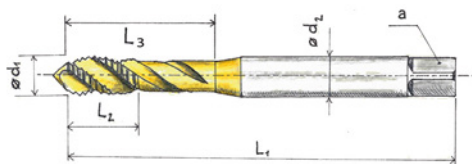

DIN 376
M12 - M30

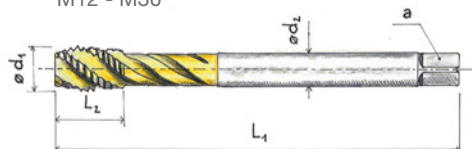

ISO		[m/min]
P	P.2	25-30
	P.3	20-25
	P.4	15-20
	P.5	5-10
	P.7	8-10
M	M.1	8-10
K	K.2	20-25
N	N.3	25-30
	N.6	25-30

Artikelbezeichnung Item Code	Bestell-Nr. Ordering No.	Verfügbarkeit Availability	Typ Type	Abmessungen [mm] Dimensions [mm]							z	 [mm]
				d ₁	P	L ₁	L ₂	L ₃	d ₂	a		
BA60 7G 02 M3	5162708		M	3	0.5	56	7	15	3.5	2.7	3	2.5
BA60 7G 02 M4	5162709		M	4	0.7	63	8.5	21	4.5	3.4	3	3.3
BA60 7G 02 M5	5162710		M	5	0.8	70	10	24.5	6	4.9	3	4.2
BA60 7G 02 M6	5162711		M	6	1	80	12	29	6	4.9	3	5
BA60 7G 02 M8	5162712		M	8	1.25	90	15	33	8	6.2	3	6.8
BA60 7G 02 M10	5162714		M	10	1.5	100	17.5	38	10	8	3	8.5
Mit Überlaufschaft with standard straight shank												
BA60 7G 02 M12	5162715		M	12	1.75	110	18	-	9	7	4	10.2
BA60 7G 02 M14	5162717		M	14	2	110	20.5	-	11	9	4	12
BA60 7G 02 M16	5162718		M	16	2	110	20.5	-	12	9	4	14