

BP60

P-Line

HSSE
PM

TiCN
B+

6HX


M



RH

3xD

C

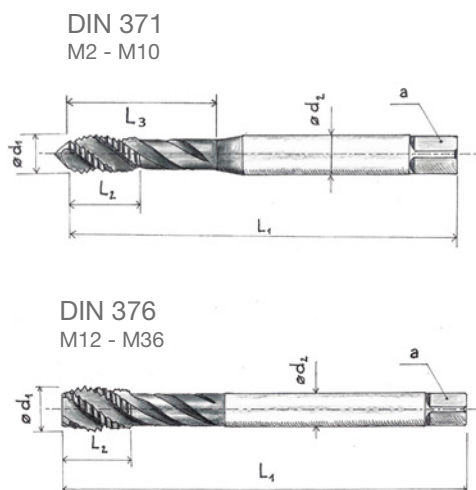

ISO		[m/min]
P	P.3	20-30
	P.4	15-25
	P.5	5-15
	P.7	10-15
M	M.1	10-15
	M.2	5-7
K	K.2	20-30
N	N.3	25-35
	N.6	25-35
S	S.1	10-15
	S.3	10-15

Artikelbezeichnung Item Code	Bestell-Nr. Ordering No.	Verfügbarkeit Availability	Typ Type	Abmessungen [mm] Dimensions [mm]							z	 [mm]
				d ₁	P	L ₁	L ₂	L ₃	d ₂	a		
BP60 03 M2	5094291	●	M	2	0.4	45	6	12	2.8	2.1	3	1.6
BP60 03 M2.5	5084090	●	M	2.5	0.45	50	6.5	15	2.8	2.1	3	2.05
BP60 03 M3	5075342	●	M	3	0.5	56	7	15	3.5	2.7	3	2.5
BP60 03 M4	5075343	●	M	4	0.7	63	8.5	21	4.5	3.4	3	3.3
BP60 03 M5	5075344	●	M	5	0.8	70	10	24.5	6	4.9	3	4.2
BP60 03 M6	5075345	●	M	6	1	80	12	29	6	4.9	3	5
BP60 03 M8	5075348	●	M	8	1.25	90	14	33	8	6.2	3	6.8
BP60 03 M10	5075350	●	M	10	1.5	100	17	39	10	8	3	8.5
Mit Überlaufschaft with standard straight shank												
BP60 03 M12	5075351	●	M	12	1.75	110	18	-	9	7	4	10.2
BP60 03 M14	5082392	●	M	14	2	110	20.5	-	11	9	4	12
BP60 03 M16	5060320	●	M	16	2	110	20.5	-	12	9	4	14
BP60 03 M18	5094301	●	M	18	2.5	125	25.5	-	14	11	4	15.5
BP60 03 M20	5080191	●	M	20	2.5	140	25.5	-	16	12	4	17.5
BP60 03 M24	5094302	●	M	24	3	160	32	-	18	14.5	4	21
BP60 03 M27	5090125	●	M	27	3	160	32	-	20	16	5	24
BP60 03 M30	5094305	●	M	30	3.5	180	37	-	22	18	5	26.5
BP60 03 M33	5094307	●	M	33	3.5	180	37	-	25	20	5	29.5
BP60 03 M36	5094308	●	M	36	4	200	42	-	28	22	5	32