

Zugspannzangen

Art.-Nr.	Bild	d	D	L	K°	Gewinde G	max. Bohrung
302 E	1	8	13	34	20	6,85 x 0,625	6
303 E	1	9,3	15	50	21	8,25 x 1/32"	7,5
313 E	1	10	14,5	73	20	M 9,2 x 1	8
314 E	1	10	14	41,5	15	S 9,83 x 0,833	8
318 E	1	12	16	43,5	15	S 11,75 x 1,25	10
319 E	1	12	18	60,0	20	Tr 12 x 1	10
3213 E	1	15	20,2	58,3	15	14,75 x 1,25	12,5
324 E	1	15	21,5	53,0	20	M 13 x 1	13
330 E	1	16	24	70,0	20	Tr 16 x 1,5	13
349 E	1	20	26,3	69,0	15	S 19,7 x 1,667	20
350 E	1	20	27,5	117,0	20	M 18,5 x 1,4	18
351 E	1	20	28	80,0	20	Tr 20 x 1,5	17,5
354 E	1	20	28	117,0	17,5	19 x 1/20"	17,5
355 E	1	20	28	117,5	17,5	S 20 x 2	18
358 E	1	23	32	82,0	20	21,1 x 1	20
359 E	1	23	32	90,0	20	Tr 23 x 1,5	20
369 E	2	24,12	32	101,5	8,5	7/16" x 1/20"	20
363 E	1	25	33,5	84,0	16	M 23 x 1	22
364 E	1	25	34	92,5	15	S 25 x 1/15"	22
366 E	1	28	36	102,0	18	Tr 27 x 1/20"	25
367 E	1	28	38	100,0	20	Tr 28 x 1,5	24
385 E	1	31,75	37,5	83,0	10	31,45 x 1/20"	26
3713 E	1	32	40	100,0	15	S 29,7 x 1/15"	30
386 E	1	32	45	110,0	20	Tr 32 x 1,5	29
3838 E	1	45	53	109,0	15	M 42 x 1,5	40
389 E	1	45	60	140,0	20	Tr 45 x 2	40
390 E	1	47	60	110,0	20	Tr 47 x 1,5	42

Hervorgehobene Art.-Nr. entsprechen DIN 6431

Typ NK

Art.-Nr.	d	D	L	K°	Gewinde G	max. Bohrung
637 E	16	24,5	58,0	24	M 16 x 1	12
666 E	25	35,5	67,0	20	M 25 x 1	21
667 E	36	46,5	72,5	20	M 36 x 1,5	31
668 E	50	62,5	98,0	20	M 50 x 2	43
669 E	60	73,5	101,0	20	M 60 x 2	52




Bild 1

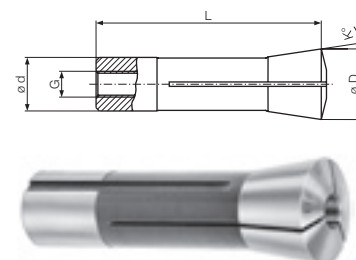


Bild 2

