





Material:SCM435 steel
Heat treated
Black oxide finish
Precision ground

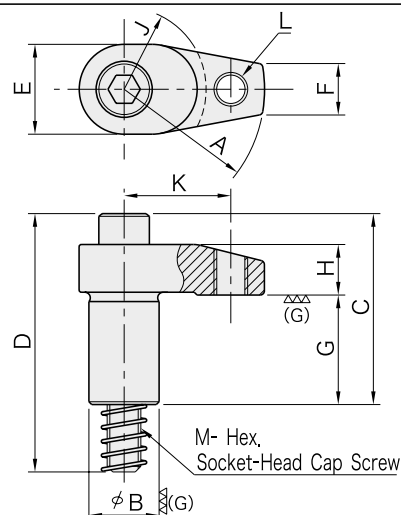

·Use with a BJ530 Hook-Clamp Holder.

How To Use (Reference)

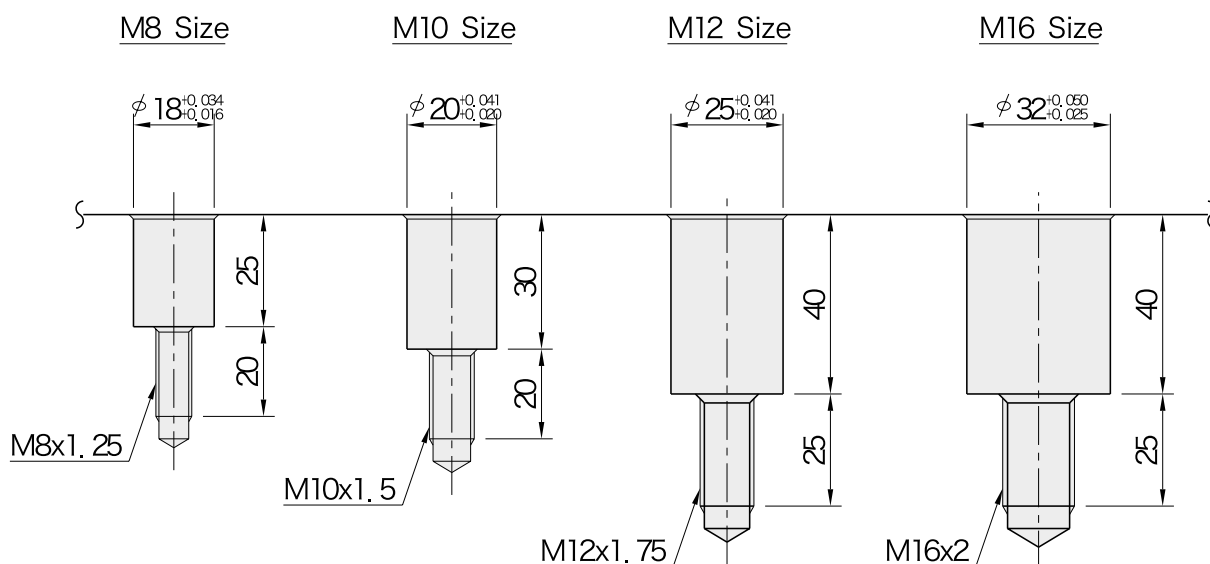

Hook Clamps can be plugged directly into custom blocks with receiving holes as specified above.

Part Number	A	B (h7)	C	D	E	F	G	H	J	K	L	M	Allowable Screw Torque (N·m)	Weight (Kg)
51991637	20	18	37	58	22	10	23	12	15	-	-	M8x1.25 - 50L	38	90
51991638	25								20				33	95
51991639	30								25				30	105
51991640	30	20	54	75	24	12	30	15	20	-	-	M10x1.5 - 65L	38	200
51991641	40								25				32	210
51991642	40								30				30	220
51991643	50	25	66	92	32	18	39	16	25	-	-	M12x1.75 - 80L	60	280
51991644	60		68					18					50	310
51991645	40		66					16					46	350
51991646	50	25	66	92	32	18	39	16	25	31	M12x1.75	M12x1.75 - 80L	60	280
51991647	60		68					18					50	310
51991648	40		66					16					46	350
51991649	50	32	75	101	36	22	39	21	25	-	-	M16x2 - 85L	170	420
51991650	60												150	470
51991651	50												130	530
51991652	60	32	75	101	36	22	39	21	25	38	M12x1.75	M16x2 - 85L	150	470
													130	530