


QUAD-EXTRA HD50 T51

Permanent-electro magnetic plates High Density Thickness 51 mm

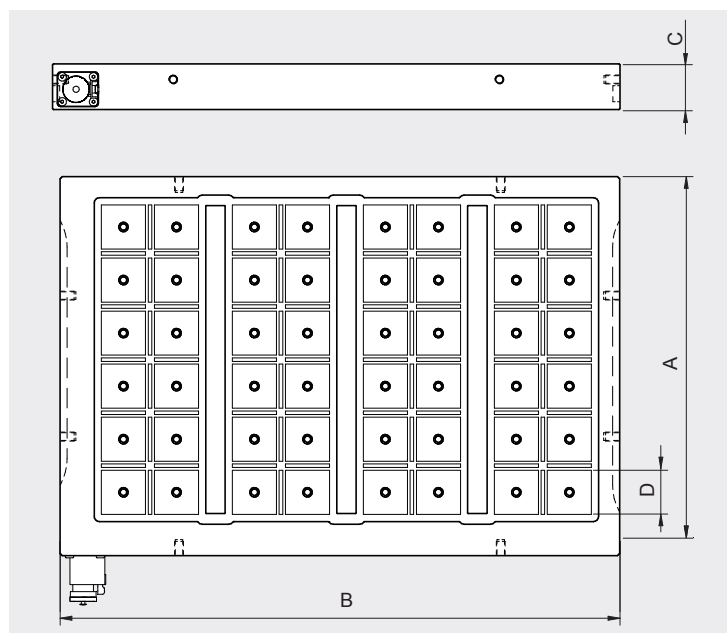

Standard supply

- Permanent-electro magnetic chuck with mono-block polar plate and quick waterproof connector ERGON 5 pin
- n. 2 side slots for easy installation on machine table
- Drawing of machinable areas to drill through holes for installation based on the size of the magnetic plate
- CE declaration of conformity
- Instruction manual on digital support

Recommended accessories

- Fix extension Cod. PFR50/32 (pag. 42)
- Moving extension Cod. PMQ50/32 (pag. 42)

Model	Size				Poles	Clamping force	Weight
	A	B	C *	D			
	mm	mm	mm	□ mm	n.	kN	Kg
QX 203 HD50 T51	250	340	51	50	12	47	35
QX 205 HD50 T51	250	490	51	50	18	71	45
QX 206 HD50 T51	250	635	51	50	24	94	60
QX 208 HD50 T51	250	785	51	50	30	118	75
QX 209 HD50 T51	250	935	51	50	36	141	85
QX 210 HD50 T51	250	1085	51	50	42	165	100
QX 303 HD50 T51	310	340	51	50	16	63	40
QX 305 HD50 T51	310	490	51	50	24	94	55
QX 306 HD50 T51	310	635	51	50	32	125	75
QX 308 HD50 T51	310	785	51	50	40	157	90
QX 309 HD50 T51	310	935	51	50	48	188	105
QX 310 HD50 T51	310	1085	51	50	56	220	125
QX 403 HD50 T51	430	340	51	50	24	94	55
QX 405 HD50 T51	430	490	51	50	36	141	80
QX 406 HD50 T51	430	635	51	50	48	188	100
QX 408 HD50 T51	430	785	51	50	60	235	125
QX 409 HD50 T51	430	935	51	50	72	282	145
QX 410 HD50 T51	430	1085	51	50	84	329	170
QX 503 HD50 T51	490	340	51	50	28	110	60
QX 505 HD50 T51	490	490	51	50	42	165	90
QX 506 HD50 T51	490	635	51	50	56	220	115
QX 508 HD50 T51	490	785	51	50	70	274	140
QX 509 HD50 T51	490	935	51	50	84	329	165
QX 510 HD50 T51	490	1085	51	50	98	384	190
QX 603 HD50 T51	610	340	51	50	36	141	75
QX 605 HD50 T51	610	490	51	50	54	212	105
QX 606 HD50 T51	610	635	51	50	72	282	140
QX 608 HD50 T51	610	785	51	50	90	353	170
QX 609 HD50 T51	610	935	51	50	108	423	205

* ± 0,5 mm

Minimum size of work-piece: 110 x 110 mm

Minimum thickness of work-piece: 12 mm
Suitable control unit Cod. ST200FA (pag. 45)