

Counterbores with fixed pilot

180°, 90°




CS11305

CS15305

CZ Záhlučníky s vodícím čepem | 180°, 90°

DE Flachsenker mit festem | 180°, 90°

RU Цековка с направляющим пилотом | 180°, 90°

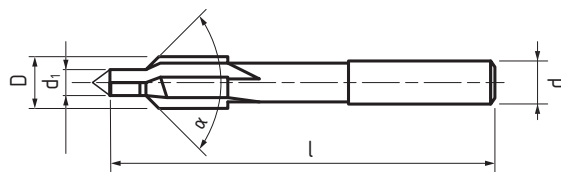

CS11305



CS15305



D	d	screw thread*	d1	l	α	CS11305	CS15305
4	1,6	M 2	4,3	56	90°		.04016
4	2,2	M 2	4,3	56	90°		.04022
4,3	1,6	M 2	4,3	56	180°	.043016	
4,3	2,5	M 2	4,3	56	180°	.043025	
4,9	2,05	M 2,5	5	56	90°		.049205
4,9	2,7	M 2,5	5	56	90°		.04927
5	2,05	M 2,5	5	71	180°	.0500205	
5	2,7	M 2,5	5	71	180°	.050027	
5,7	2,5	M 3	5	71	90°		.05725
5,7	3,2	M 3	5	71	90°		.05732
6	2,5	M 3	5	71	180°	.060025	
6	3,2	M 3	5	71	180°	.060032	
6,5	2,9	M 3,5	5	71	180°	.065029	
6,5	3,7	M 3,5	5	71	180°	.065037	
6,7	2,9	M 3,5	5	71	90°		.06729
6,7	3,7	M 3,5	5	71	90°		.06737
7,8	3,3	M 4	5	71	90°		.07833
7,8	4,3	M 4	5	71	90°		.07843
8	3,3	M 4	5	71	180°	.080033	
8	4,3	M 4	5	71	180°	.080043	
8	4,5	M 4	5	71	180°	.080045	
9,5	4,2	M 5	8	80	90°		.09542
9,5	5,3	M 5	8	80	90°		.09553
10	4,2	M 5	8	80	180°	.100042	
10	5,3	M 5	8	80	180°	.100053	
10	5,5	M 5	8	80	180°	.100055	
11	5	M 6	8	80	180°	.110050	
11	6,4	M 6	8	80	180°	.110064	
11,4	5	M 6	8	80	90°		.11450
11,4	6,4	M 6	8	80	90°		.11464
15	6,8	M 8	12,5	100	180°	.150068	
15	8,4	M 8	12,5	100	180°	.150084	
15	9	M 8	12,5	100	180°	.150090	
18	8,5	M 10	12,5	100	180°	.180085	
18	10,5	M 10	12,5	100	180°	.180105	
18	11	M 10	12,5	100	180°	.180110	
20	10,2	M 12	12,5	100	180°	.200102	
20	13	M 12	12,5	100	180°	.200130	
20	14	M 12	12,5	100	180°	.200140	

* závit šroubu | Gewinde der Schraube | резьба винта