


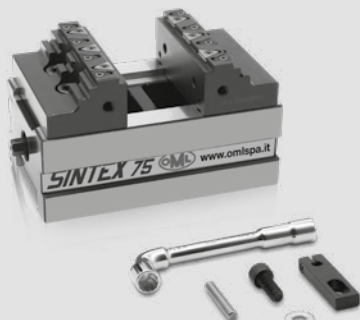

Applications / Customer Benefits


- Highly precise self-centering clamping with maximum repeatability
- Compact design for better accessibility and very large drainage slots
- Jaws with SinterGrip clamping inserts for minimum workpiece clamping depth without pre-machining
- Wide clamping range
- Ideal for OP 10 and OP 20

Technical features







- Self-centering clamping
- Clamping force up to 20 kN
- Jaw width 75 mm
- Interface for zero point systems APS / WPS

Standard equipment

Wrench, jaws, Sintergrip inserts.

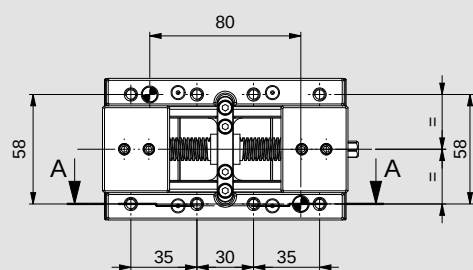

SECTION A-A

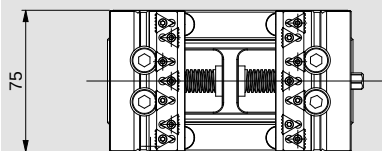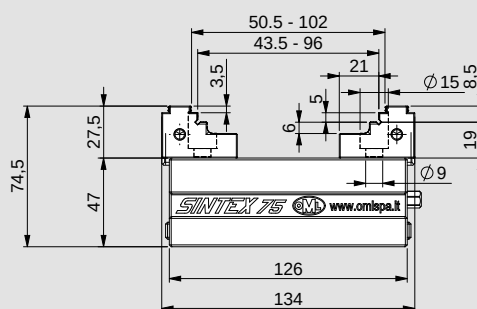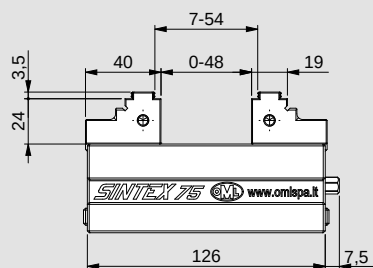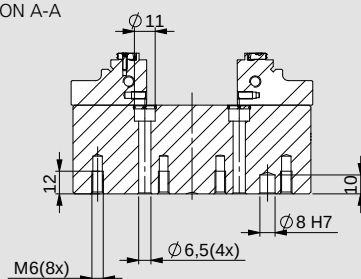

Id. No.	Type
77584931	SINTEX 75 STD
77584932	SINTEX 75 ALU
77584933	SINTEX 75 HRC