

Gewindefräser

Gewindefräser ohne Senkfase für Metr. ISO-Gewinde




Katalog-Nr. 53830



P	M	K	N	S	H
•	•	•	•	•	○

Arbeitsrichtwerte
Seite 30

- Gewindefräser ohne Senkfase, mit Spiralnut und innerer Kühlmittelzufuhr mit axialem Austritt
- universelle Verwendung
- für Gewindetiefen bis 2xD

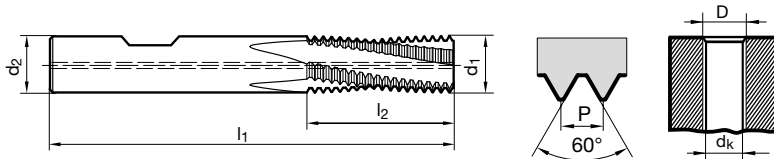

Code-Nr.	D	P mm	d1 mm	d2 mm	dk mm	l1 mm	l2 mm	Z
4,000	M4	0,700	3,000	6,000	3,30	48,000	8,800	3
5,000	M5	0,800	4,000	6,000	4,20	54,000	10,800	3
6,000	M6	1,000	4,800	6,000	5,00	54,000	13,500	3
8,000	M8	1,250	6,400	8,000	6,80	62,000	18,100	3
8,005	M8 x 1	1,000	6,400	8,000	7,00	62,000	17,500	3
10,000	M10	1,500	7,950	10,000	8,50	74,000	21,800	3
10,005	M10 x 1	1,000	7,950	10,000	9,00	74,000	21,500	3
10,006	M10 x 1,25	1,250	7,950	10,000	8,80	74,000	21,900	3
12,000	M12	1,750	9,950	10,000	10,20	74,000	25,400	4
12,007	M12 x 1,5	1,500	9,950	10,000	10,50	74,000	26,300	4
14,000	M14	2,000	11,200	12,000	12,00	90,000	31,000	4
14,007	M14 x 1,5	1,500	11,200	12,000	12,50	90,000	30,800	4
16,000	M16	2,000	12,800	14,000	14,00	90,000	35,000	4
16,007	M16 x 1,5	1,500	12,800	14,000	14,50	90,000	33,800	4
20,000	M20	2,500	14,950	16,000	17,50	102,000	41,300	4
20,007	M20 x 1,5	1,500	14,950	16,000	18,50	102,000	42,800	4