

M
MF
MJ
EG M

G
Rc, R
Pg

UNC
UNF
UN
UNJF

NPT
NPTF

G
BSW
BSF
DIN 477
R, BA, Pg

UNC
UNF
UNEF
UN, UNS

NPSM
NPT
NPTF
Tr, Rd

M
MF

G
BSW
BSF
R, Pg
MF-EL

UNC, UNF
UNEF
UN, UNS
UNJC
UNJF

NPT
NPTF
Tr
EG

Präzisions-Schneideisen

Gewinde an Gasflaschenventilen
Kegeliges Whitworth-Gewinde DIN 477,
DIN EN ISO 11363-1
DIN EN 144-1, DIN EN 629-1,
DIN EN ISO 11116-1

Kegel 3:25

Ausführung: mit Schälanschnitt

Precision thread cutting dies


Threads on gas cylinder valves

Whitworth taper thread DIN 477, DIN EN ISO 11363-1

DIN EN 144-1, DIN EN 629-1 and DIN EN ISO 11116-1

Taper 3:25

Specification: with spiral entry

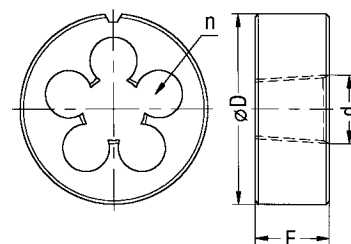

ORDER-CODE → RU				MS	
d	P Gg/1" tpi	Ø D x E mm	n	kegelig HSS tapered x = 1.75 · P	kegelig HSS Messing geläppt tapered brass lapped x = 1.25 · P
↓	↓				
W 19,8 (17E)	14	45 x 25	5	Art.-Nr. 103944	Art.-Nr. 103945
W 28,8 (25E)	14	65 x 30	5	108500	103946
W 31,3	14	65 x 30	6	141082	103947

Präzisions-Schneideisen

Gewinde an Gasflaschenventilen
Zylindrisches Whitworth-Gewinde DIN 477


Ausführung: mit Schälanschnitt

Precision thread cutting dies

Threads on gas cylinder valves

Whitworth parallel thread DIN 477

Specification: with spiral entry



ORDER-CODE → RU				MS		LH	LH-MS
d	P Gg/1" tpi	Ø D x E mm	n	zylindrisch HSS parallel x = 1.75 · P	zylindrisch HSS Messing geläppt parallel brass lapped x = 1.25 · P	zylindrisch links HSS parallel, left hand x = 1.75 · P	zylindrisch links HSS Messing geläppt parallel, left hand brass lapped x = 1.25 · P
↓	↓						
W 21,8	14	55 x 16	5	Art.-Nr. 103859	Art.-Nr. 103860	Art.-Nr. 103861	Art.-Nr. 103862
W 24,32	14	55 x 16	6	103865	103866		

→ gel, für geläppt Ausführung 20% Zuschlag
○ am Lager, Preis auf Anfrage

→ gel, for lapped threads 20% extra charge
○ in stock, price on request