
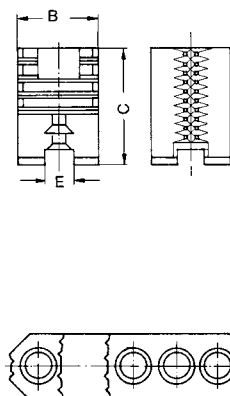


Reversible top jaws UB, hardened

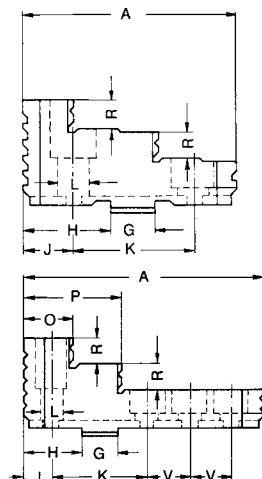

Tool group A09

Type 303 **Reversible top jaws UB DIN 6350, set, hardened**

Chuck Type	3-jaw set	4-jaw set	Jaw length A	Jaw width B	Jaw height C	E	G	H	J	K	R	Weight approx. kg
ZG 100/3; ZG 110/3; ZG Hi-Tru 100/3; ZGU 100/3; ZGU 110/3; ZS 100/3; ZSU 100/3	108045	108053	47	22	29,5	7,96	9,5	19,25	12	24	6	0,12
ZG 125/3; ZG Hi-Tru 125/3; ZGU 125/3; ZS 125/3; ZSU 125/3	108046	108054	56	26	37,5	7,96	12,68	22,6	13	32	8	0,19
ZG 140/3; ZG 160/3; ZG Hi-Tru 160/3; ZGU 140/3; ZGU 160/3; ZS 140/3; ZS 160/3; ZSU 140/3; ZSU 160/3	107936	107938	66,7	28	41,5	7,96	12,68	28,5	15,8	38,1	9 ¹⁾ / 10,5 ²⁾	0,27
ZG 200/3; ZGD 200/3; ZG Hi-Tru 200/3; ZGU 200/3; ZS 200/3; ZSU 200/3	107937	107939	79,5	30	42,5	7,96	12,68	34,9	19	44,45	9 ¹⁾ / 10,5 ²⁾	0,39
ZG 250/3; ZGD 250/3; ZG Hi-Tru 250/3; ZGU 250/3; ZS 250/3; ZSU 250/3	108049	108057	95,3	36	52,5	12,72	19,03	39,7	22,2	53,95	14	0,66
ZG 315/3; ZGD 315/3; ZG Hi-Tru 315/3; ZGU 315/3; ZS 315/3; ZSU 315/3	108050	108058	109,5	42	57,5	12,72	19,03	47,6	25,4	63,5	15	1,02
ZG 350/3; ZG 400/3; ZGD 400/3; ZGU 350/3; ZGU 400/3; ZS 350/3; ZS 400/3; ZSU 350/3; ZSU 400/3	108051	108059	127	42	64,5	12,72	19,03	57,1	28,5	76,2	15	1,27
ZG 500/3; ZG 630/3; ZGD 500/3; ZGU 500/3; ZGU 630/3; ZS 500/3; ZS 630/3; ZSU 500/3; ZSU 630/3	108052	108060	127	50	79,5	12,72	19,03	57,1	28,5	76,2	20	2
ZGU 700/3; ZGU 800/3; ZSU 700/3; ZSU 800/3	105081	105085	210	68	89	12,72	19,03	57,1	28,5	76,2	22	4,45
ZGU 1000/3; ZGU 1250/3; ZSU 1000/3; ZSU 1250/3	105098	105101	210	68	110	12,72	19,03	57,1	28,5	76,2	25	6,1

¹⁾ with M8

²⁾ with $\frac{3}{8}$ " mounting dimensions to ISO 3442

Stepped and hardened jaws, supplied as supplement or as spares, must be ground on the chuck.

In case of a subsequent jaw delivery please send us the chuck.